



**Product Name: ZENITH S**


## General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

-  Luminaires marked with this symbol must not be covered with thermally insulating material.
-  This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

## Dimensions


	A (mm)	B (mm)	C (mm)
ZNS1000WNW / ZNS1300WNW / ZNS1600WNW / ZNS2000WNW	1240	84	118

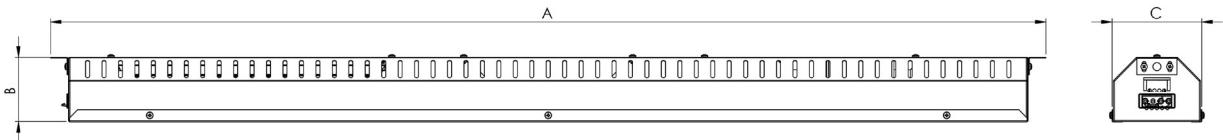**Page 1 of 2**

Tamlite Technical  
 Stafford Park 12,  
 Telford, Shropshire,  
 TF3 3BJ

+44(0)1952 292441  
 technical@tamlite.co.uk  
 Document No: V1



Product Name: ZENITH S

<p><b>1</b></p> <p>Remove the product from its packaging.</p>	<p><b>2</b></p> <p>Remove the two brackets from the body and rotate them.</p>			
<p><b>3</b></p> <p>Reattach the brackets to the body.</p>	<p><b>4</b></p> <p>Feed an adequate suspension through the bracket.</p>			
<p><b>5</b></p> <p>Suspend the luminaire.</p>	<p><b>6</b></p> <p>Plug terminations for standard, emergency, DALI and DALI emergency variants.</p> <table border="0"> <tr> <td style="text-align: center;"> <p>L Earth Neutral</p> </td> <td style="text-align: center;"> <p>Switched Live Earth Neutral Permanent Live</p> </td> <td style="text-align: center;"> <p>Switched Live Earth Neutral Permanent Live Dali 1 Dali 2</p> </td> </tr> </table>	<p>L Earth Neutral</p>	<p>Switched Live Earth Neutral Permanent Live</p>	<p>Switched Live Earth Neutral Permanent Live Dali 1 Dali 2</p>
<p>L Earth Neutral</p>	<p>Switched Live Earth Neutral Permanent Live</p>	<p>Switched Live Earth Neutral Permanent Live Dali 1 Dali 2</p>		
<p><b>7</b></p> <p>Connect incoming supply cable and plug to the socket mounted on the luminaire.</p>	<p><b>8</b></p>			

Page 2 of 2

Tamlite Technical  
 Stafford Park 12,  
 Telford, Shropshire,  
 TF3 3BJ

+44(0)1952 292441  
 technical@tamllite.co.uk  
 Document No: V1

CE	UK CA		220-240V 50/60Hz		IP20	IK10	<b>ta</b> -25°C to 50°C 5°C to 25°C for M3 variants
----	----------	--	---------------------	--	------	------	--