

# EUROLUX LED

Polycarbonate LED emergency bulkhead for improved efficiency and low maintenance

## Features LED INSIDE


- Versatile emergency bulkhead
- High lumen output (115 lm)
- Low maintenance LED
- Slave options for central battery system
- Integrated battery charge indicator
- IP65

## Construction

- Supplied with high output LEDs
- Hinged gear tray
- High impact vandal resistant polycarbonate body + diffuser
- Quality Nickel Cadmium (NiCad) batteries
- Designed for multiple cable entry for through wiring and BESA box entry

## To Specify Order

- White polycarbonate IP65 LED emergency bulkhead as per Tamlite 'EUROLUX LED' range

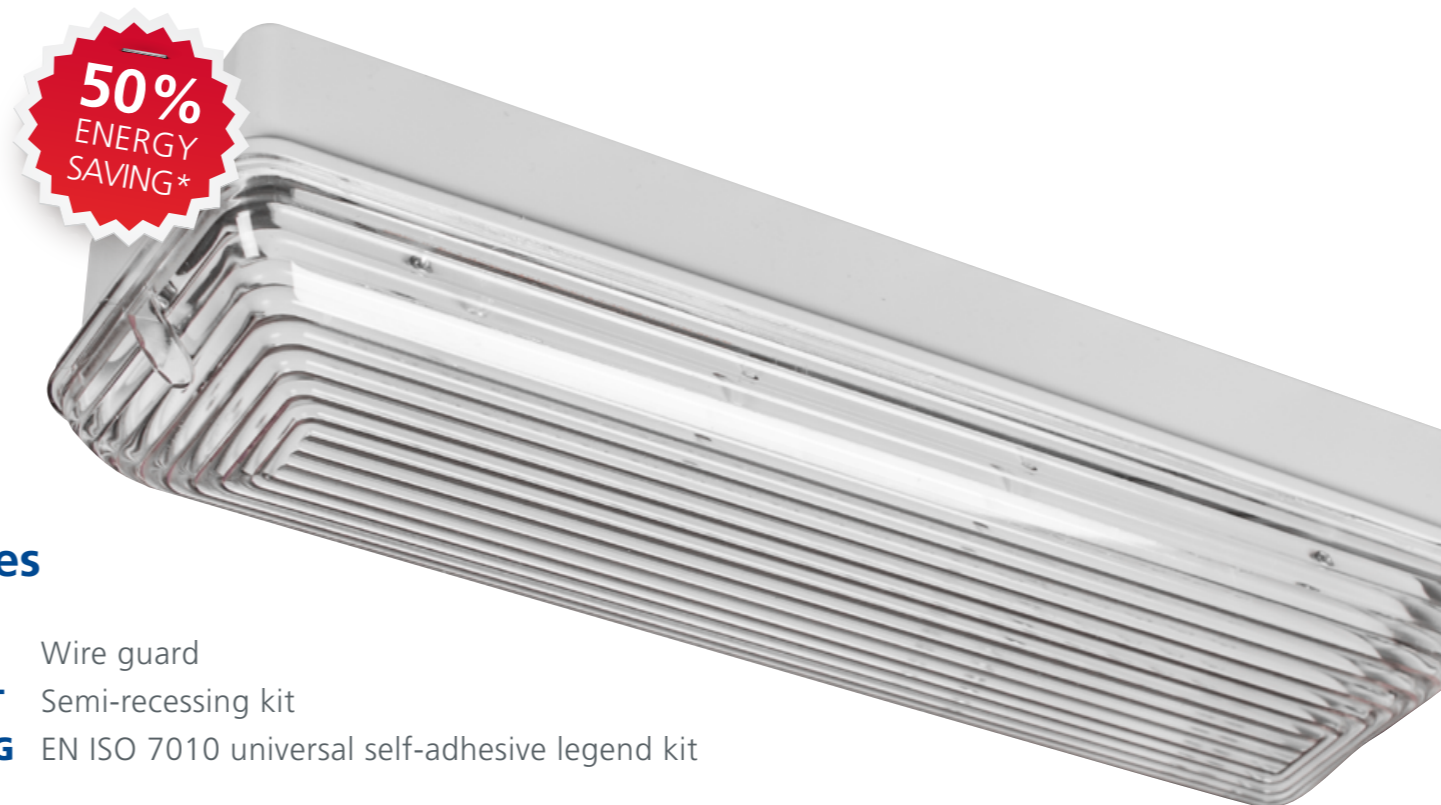

## Accessories

- EUROGUARD** Wire guard
- EURO8/BZ KIT** Semi-recessing kit
- EURO UNI LEG** EN ISO 7010 universal self-adhesive legend kit



Legend now available to the new standard 'ISO 7010'

0159 EUROLUX LED

Polycarbonate LED IP65 emergency bulkhead						⊕	IP65	F	Dimensions (mm)	
Order code	Description	Lamp type	Total Power (W)	Control Gear	Wgt (kg)	Length	Height	Depth		
EUROLEDNM3	EUROLUX 20xLED 3-hour Non-maintained emergency bulkhead	•	3.62	Integrated	1.10	384	114	92		
EUROLEDM3	EUROLUX 20xLED 3-hour Maintained emergency bulkhead	•	6.60	Integrated	1.40	384	114	92		

\* 50% energy saving compared to conventional 8W fluorescent