

ASTRO



High output LED downlight suitable for corridors and toilets

Available in 3 different outputs

Low glare TP(a) rated opal diffuser



Lighting for
a Living

ASTRO



- High output LED downlight suitable for corridors and toilets
- Available in 3 different outputs
- Low glare TP(a) rated opal diffuser
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 110 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)




5 YR IP54 TP(a)

High output LED downlight

Order Code	Description	lm	W	lm/W	kg
AST110NW	10W - 4000K	1100	10	110	0.75
AST220NW	20W - 4000K	2200	20	110	0.75
AST300NW	28W - 4000K	3000	28	107	0.75

Dimensions

Order Code	C (mm)	Dia. (mm)	Cut-Out (mm)
AST110NW	45	230	205
AST220NW	45	230	205
AST300NW	45	230	205

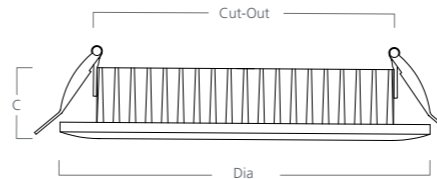

CONSTRUCTION

- Die-cast aluminium body finished in white (RAL 9010)
- Opal Polycarbonate TP(a) diffuser
- Remote driver
- Supplied as standard with neutral white (4000K) LED

OPTIONS


D3	DALI self test
D	Dimmable DALI
RM3	Remote maintained 3 hours emergency
WW	Warm white (3000K)

INSTALLATION NOTES

Recessed into plasterboard or exposed grid ceiling via spring clips and wired to 3-way connection on driver

TO SPECIFY

High output LED downlight as per TamLite ASTRO range

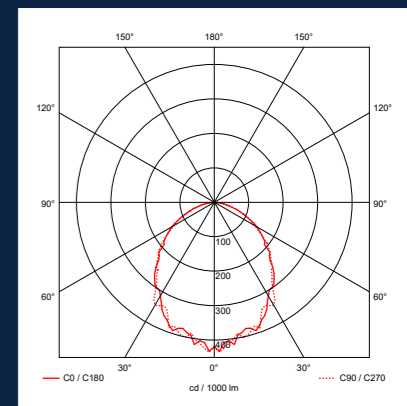

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics