

CITY BL



Ideal for pathways and pedestrian areas

Symmetric distribution

Surface mounted utilising J bolts



Lighting for
a Living

CITY BL



- Ideal for pathways and pedestrian areas
- Symmetric distribution
- Surface mounted utilising J bolts
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP65




Extruded aluminium LED bollard

Order Code	Description	lm	W	lm/W	kg
CBL90NW	9W - 4000K	900	9	100	5.7

Dimensions

Order Code	C (mm)	Dia. (mm)
CBL90NW	1000	180

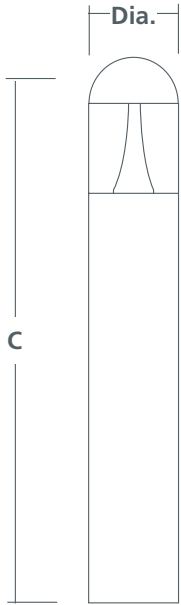

CONSTRUCTION


- Extruded aluminium body finished in black (RAL 9005)
- Integral driver
- Supplied as standard with neutral white (4000K) LED

INSTALLATION NOTES

Surface mount utilising J bolt assembly and wired via a three way terminal block. Please ensure correct ground preparations are applied before installation

TO SPECIFY

LED bollard as per TamLite CITY BL range

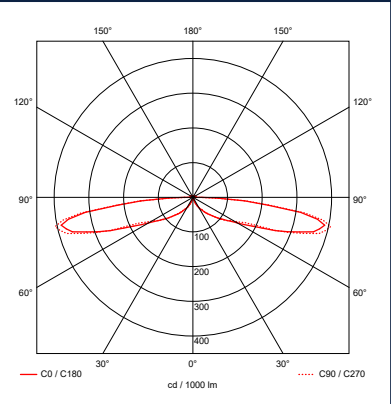

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics