

ELITE SLS



Surface downlight for open areas and escape routes

Virtually service free emergency lighting

Easy to install with simple connection wiring



Lighting for
a Living

ELITE SLS



- Surface downlight for open areas and escape routes
- Virtually service free emergency lighting
- Easy to install with simple connection wiring
- Available as basic, DALI and auto self-test versions
- Very low stand-by power loss
- Non-maintained versions
- Compatible with E-Connect
- CRI: Ra>80
- 112 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)



5 YR

IP20



IK07




Emergency surface downlight

Order Code	Description	lm	W	lm/W	kg
ELSSNM3	1.5W Emergency surface downlight	-	2	112	0.30

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
ELSSNM3	123	123	53

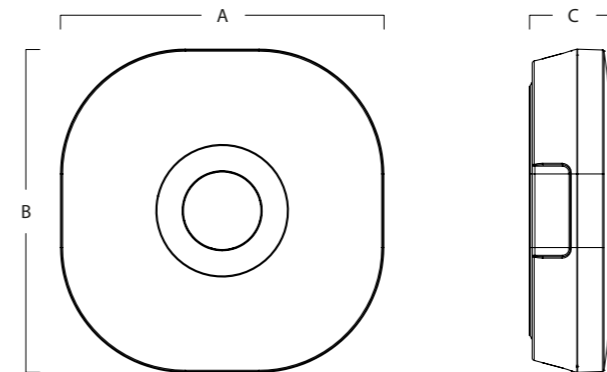

CONSTRUCTION


- Polycarbonate body finished in white
- Lithium iron phosphate (LiFePO4) batteries
- Integral driver
- Supplied as standard with daylight (6500K) LED

OPTIONS

D	Dimmable DALI
A3	Emergency self test
D3	DALI self test

INSTALLATION NOTES

View or download the installation sheet

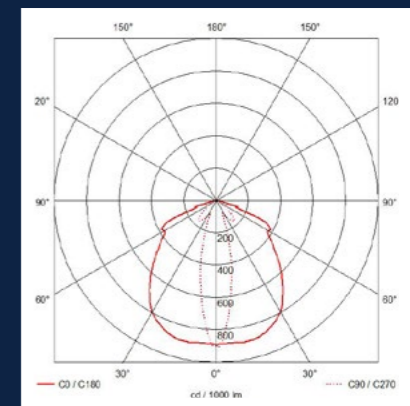

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics