

GENEVA



Full range of gear options including dimmable and DALI are available

Uplighter with low level downlight effect

Modern aesthetic design



Lighting for
a Living

GENEVA



- Suitable for communal applications
- Uplighter with low level downlight effect
- Full range of gear options including DALI are available
- CRI: Ra>80
- Up to 89 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP20




Decorative wall mounted uplight

Order Code	Description	lm	W	lm/W	kg
GEN2500NW	28W - 4000K	2500	28	89	3.9

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
GEN2500NW	760	290	70

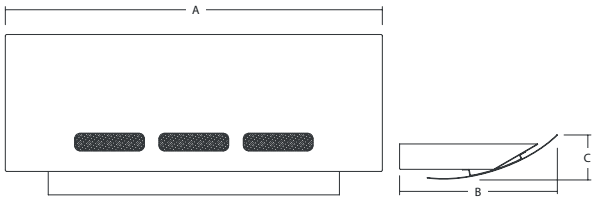

CONSTRUCTION

- Steel body finished in white (RAL 9010)
- Supplied as standard with neutral white (4000K) LED

OPTIONS


D	DALI dimming control gear
WW	Warm white (3000K)

INSTALLATION NOTES

Wall mounted via back plate screws

TO SPECIFY

Wall mounted uplight as per TamLite GENEVA range

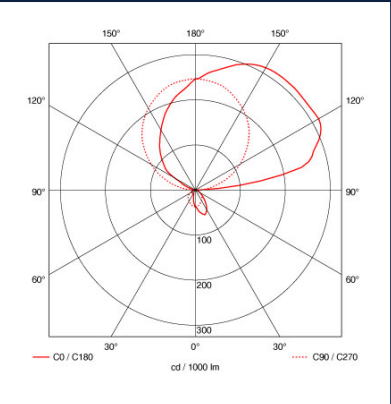

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for **a Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics