


SOLAR L



High efficacy wall light

3 different models in range (small, large and halo)

Wall or ceiling mount for corridors and staircases

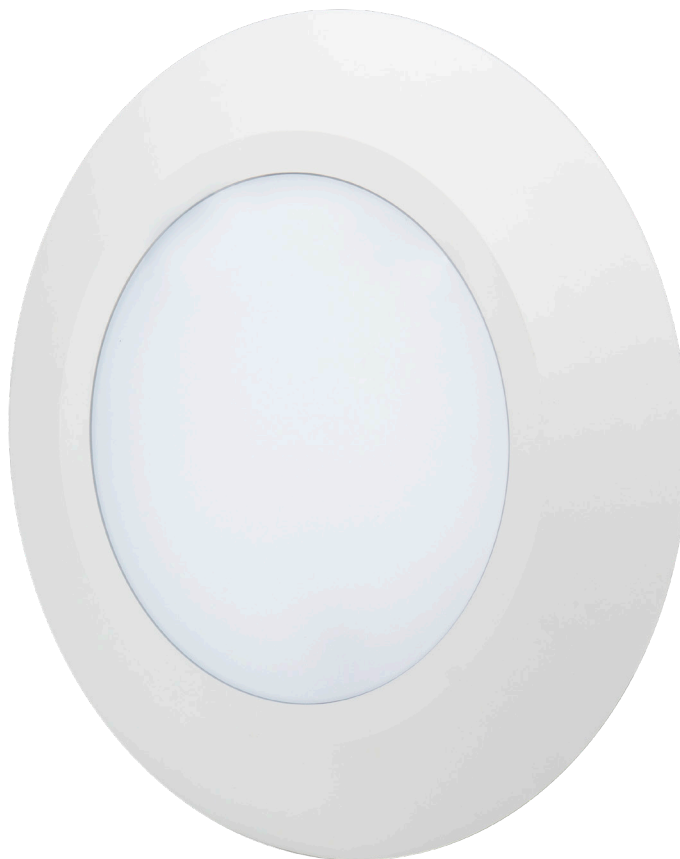

Lighting for
a Living

SOLAR L



- High efficacy wall light
- 3 different models in range (small, large and halo)
- Wall or ceiling mount for corridors and staircases
- Choice of white or satin chrome trim
- Integral sensor and emergency versions
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 60,000 hours lifetime (L80/B20)

5 YR

IP65




IK08

Modern LED wall light with large trim

Order Code	Description	lm	W	lm/W	kg
SLRL220NWW	19W - 4000K - White	2200	19	116	1.40
SLRL220NWSC	19W - 4000K - Satin chrome	2200	19	116	1.40
SLRL300NWW	25W - 4000K - White	3000	25	120	1.40
SLRL300NWSC	25W - 4000K - Satin chrome	3000	25	120	1.40

Dimensions

Order Code	Dia. (mm)	C (mm)
SLRL220NWW	436	72
SLRL220NWSC	436	72
SLRL300NWW	436	72
SLRL300NWSC	436	72



Satin chrome



CONSTRUCTION

- Polycarbonate body finished in white (RAL 9010)
- Opal TP(a) diffuser
- Supplied as standard with neutral white (4000K) LED

OPTIONS


HFS	Microwave movement sensor
D	Dimmable DALI
M3	3 hours integrated emergency
A3	Emergency self test
D3	DALI self test

INSTALLATION NOTES

Wall or ceiling fix wired via rear or 20mm side knock-outs

TO SPECIFY

Circular IP65 white / opal bulkhead as per Tamlite SOLAR range

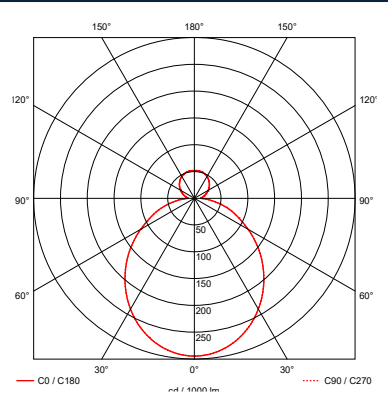

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics