

# 2020 DL

Recessed compact professional downlight



### Features:

- Suitable for retail applications
- Compact fitting with high output
- Full range of gear options including dimmable and DALI are available
- CRI: Ra>80
- Up to 80 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Pressed steel body with die-cast heat sink finished in white
- Polished and faceted aluminium reflector
- Remote driver
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- WW - Warm white (3000K)

# 2020 DL

Recessed compact professional downlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TD20DL19LNW	20W - 4000K	1600	20	80	0.61

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
TD20DL19LNW	100	100	90

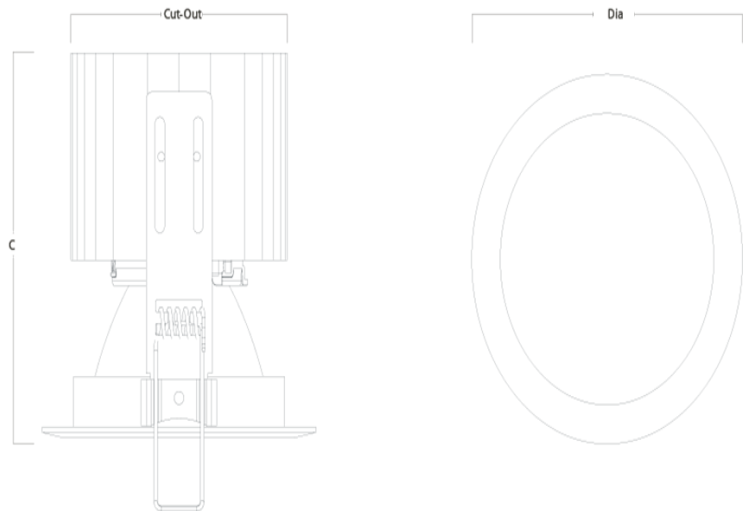

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount

### To specify:

Recessed T5 module as per Tamlite 2020 DL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.