

# 2020 EXCEL

Recessed LED module



### Features:

- High quality LED module package
- Suitable for low ceiling void installations due to shallow body
- Low glare optic with good visual contrast
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 100 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Steel body finished in white (RAL 9016)
- Also available in (RAL 9010)
- MIRO 4 aluminium louvre
- Micro linear frosted diffuser lens within polished aluminium parabolic louvre
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test

# 2020 EXCEL

Recessed LED module

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
RECAL66328NW	28W - 4000K	2800	28	100	3.5
RECAL66338NW	38W - 4000K	3800	38	100	3.5
RECAL66347NW	49W - 4000K	4700	49	96	3.5

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
RECAL66328NW	595	595	67
RECAL66338NW	595	595	67
RECAL66347NW	595	595	67

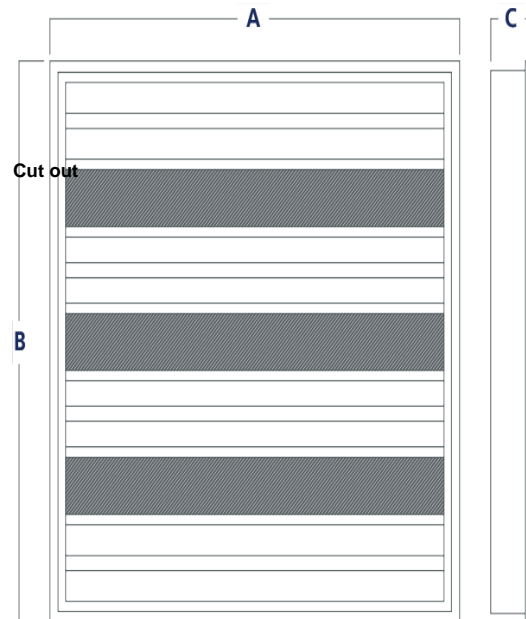

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount

### To specify:

Recessed LED module as per Tamlite 2020 EXCEL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.