


# 2020 LFL

High performance linear LED accent floodlight

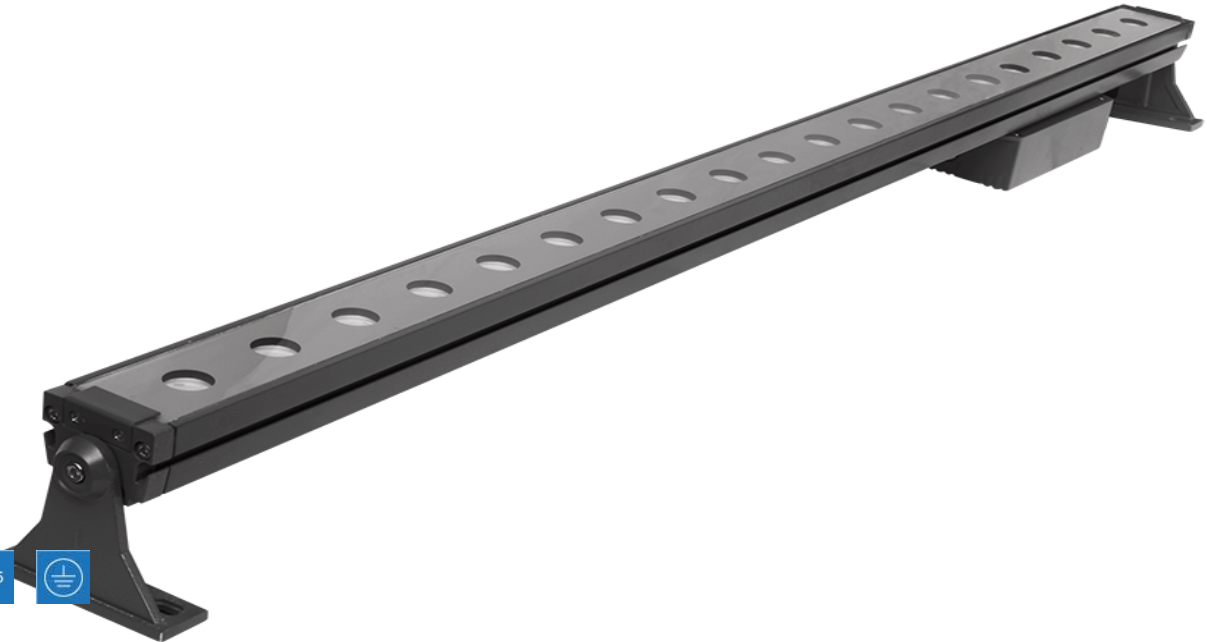

3 YR

IP65



### Features:

- Professional linear floodlight for building facade illumination
- Choice of symmetric or asymmetric distribution
- High quality build and specification for exterior, fit-and-forget installations
- RGB colour change version also available
- Fully adjustable for flexible install
- CRI: Ra>80
- Up to 48 lumens per Watt efficacy
- 30,000 hours lifetime (L70/B50)

### Construction:

- Extruded aluminium body finished in grey (RAL 7031)
- 3mm tempered glass with semi-frosted finish
- Supplied with 0.5 metre H05RN 3-core, 1.0mm cable and PG-9 PVC cable gland
- Supplied as standard with neutral white (4000K) LED

### Options:

- WW - Warm white (3000K)
- CW - Cool white (5000K)
- RGB - Colour change version

# 2020 LFL

High performance linear LED accent floodlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TA2020LFL25NW	25W - 3000K	1200	25	48	2.5
TA2020LFL56NW	56W - 3000K	2300	56	41	4.4

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
TA2020LFL25NW	500	78	86
TA2020LFL56NW	1000	78	86

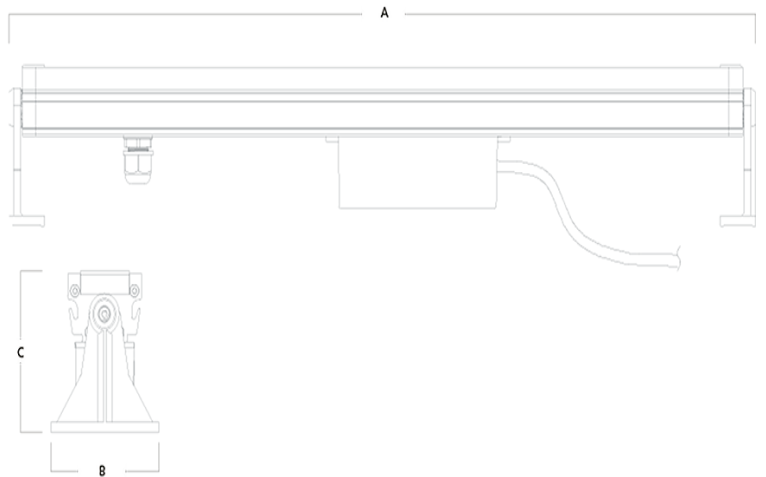

### Installation instructions:

Surface mount via die-cast aluminium bracket

### To specify:

LED wall washer floodlight as per Tamlite 2020 LFL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.