

# 2020 LGL

High performance linear LED accent ground light



5 YR

IP67



### Features:

- Professional linear ground light for building illumination
- Choice of symmetric or asymmetric distribution
- Complete with mounting sleeve and cable glands
- High quality build and specification for exterior fit-and-forget installations
- RGB colour change also available
- CRI: Ra>80
- Up to 75 lumens per Watt efficacy
- 30,000 hours lifetime (L70/B50)

### Construction:

- Stainless steel trim (SUS 316L) finished in grey (RAL 9006)
- Supplied with 0.5m H05RN 3-core, 1.0mm<sub>c</sub> cables and PG-9 PVC cable gland
- PVC mounting sleeve
- 8mm tempered glass
- Supplied as standard with neutral white (4000K) LED

### Options:

- RGB - Colour change version

# 2020 LGL

High performance linear LED accent ground light

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TA2020LGL12NW	12W - 4000K	900	12	75	1.5

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
TA2020LGL12NW	328	63	65

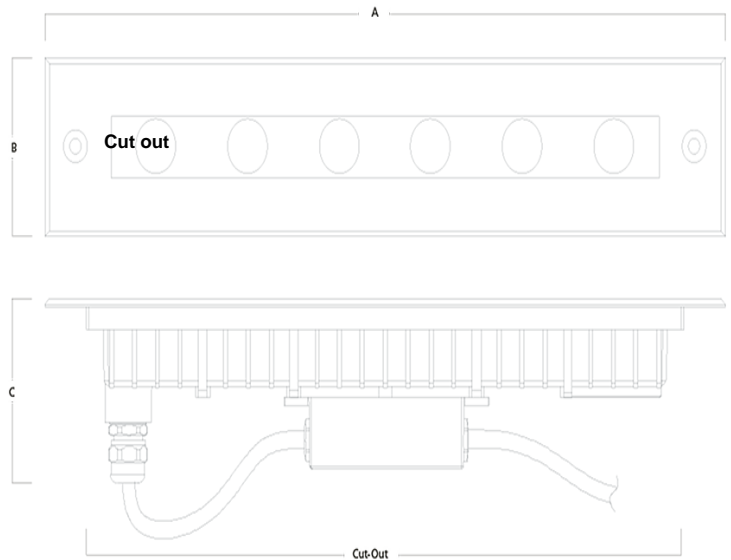

### Installation instructions:

Recessed into PVC mounting sleeve,  
fixed with stainless steel screws

### To specify:

LED wall washer/uplight as per  
Tamlite 2020 LGL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.