

ADVANCE

Recessed office module



5 YR

IP20



Features:

- Recessed LED module with profiled diffuser
- I-Tech contoured diffuser provides excellent glare control with BS EN-12464 compliance
- Suitable for office installations and general or task area lighting
- TP(a) rated diffuser
- Gear options including DALI and emergency available
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- >50,000 hours lifetime (L80/B10)

Construction:

- Steel body finished in white (RAL 9016)
- Opal and semi-prismatic polycarbonate diffuser - TP(a) rated
- Supplied as standard with neutral white (4000K) LED

Options:

- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test

ADVANCE

Recessed office module

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ADV200NW	17W - 4000K	2000	17	118	4.30
ADV300NW	25W - 4000K	3000	25	120	4.30
ADV400NW	34W - 4000K	4000	34	118	4.30

Dimensions

All dimensions are in millimetres

Order code	A	B	C
ADV200NW	595	595	70
ADV300NW	595	595	70
ADV400NW	595	595	70

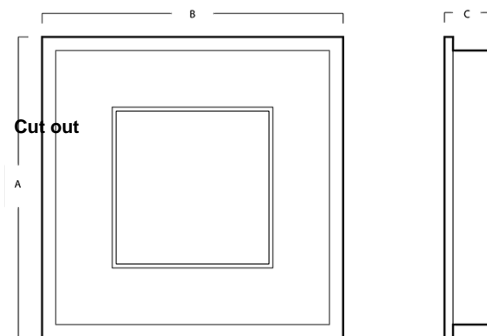

Installation instructions:

Recessed into exposed T-Bar ceiling with connection to rear mounted terminal block

To specify:

Recessed LED module with glare control diffuser as per Tamlite ADVANCE range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.