

# ADVANCE S

Surface LED Module



### Features:

- Suitable for office installations and general or task area lighting
- Surface LED module with profiled diffuser
- I-Tech multi-cell optic provides excellent glare control with BS EN-12464 compliance
- CRI: Ra>80
- Up to 130 lumens per Watt efficacy
- 50,000 hours lifetime (L80/B10)

### Construction:

- Steel body finished in white (RAL 9016)
- Opal and semi-prismatic polycarbonate diffuser - Tp(a) rated

### Options:

- No options available

# ADVANCE S

Surface LED Module

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ADVS66200NW	17W - 4000K	2000	17	118	8.70
ADVS66300NW	25W - 4000K	3000	25	120	8.70
ADVS66400NW	34W - 4000K	4000	34	118	8.70

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
ADVS66200NW	592	592	80
ADVS66300NW	592	592	80
ADVS66400NW	592	592	80

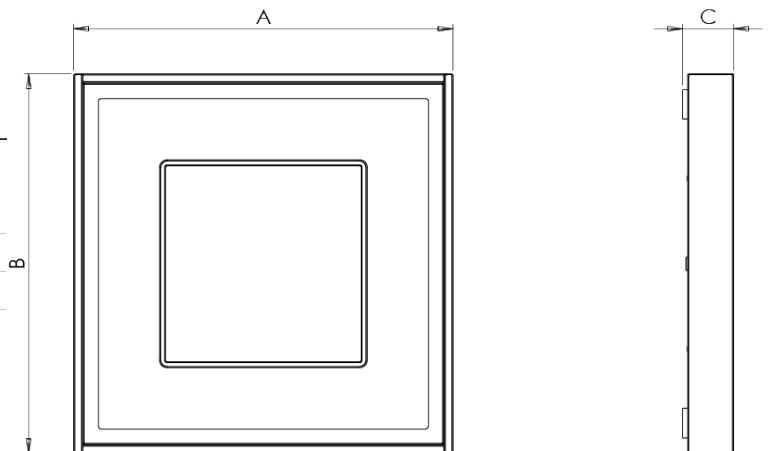

### Installation instructions:

Surface fix to ceiling via 4 corner mount 20mm dia. fixing holes and wired via 3 pole terminal block

### To specify:

Surface multi-optic module to EN 12464 as per Tamlite ADVANCE S range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.