

AIR

Circular decorative suspended pendant



5 YR

IP40



Features:

Modern suspended pendant for foyers and feature areas

Available in 2 sizes with 2 outputs

Opal diffuser provides a high uniform illuminance

DALI dimming control gear as standard

CRI: Ra>80

Up to 112 lumens per Watt efficacy

50,000 hours lifetime (L90/B10)

Construction:

Aluminium body finished in White (RAL 9016), black (RAL 9005) or grey (RAL 9006)

Inner Dia. 600mm or 1000mm

Steel ceiling plate (900mm dia.) with wire suspensions (1400mm)

Supplied as standard with neutral white (4000K) LED

Options:

M3 - 3 hours integrated emergency

A3 - Emergency self test

AIR

Circular decorative suspended pendant

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ARP930NWW	89W - 4000K - White - Dimmable DALI	9300	89	104	5.59
ARP930NWBD	89W - 4000K - Black - Dimmable DALI	9300	89	104	5.59
ARP930NWGD	89W - 4000K - Grey - Dimmable DALI	9300	89	104	5.59
ARP1600NWW	141W - 4000K - White - Dimmable DALI	16000	141	113	10.50
ARP1600NWBD	141W - 4000K - Black - Dimmable DALI	16000	141	113	10.50
ARP1600NWGD	141W - 4000K - Grey - Dimmable DALI	16000	141	113	10.50

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
ARP930NWW	60	800
ARP930NWBD	60	800
ARP930NWGD	60	800
ARP1600NWW	60	1200
ARP1600NWBD	60	1200
ARP1600NWGD	60	1200

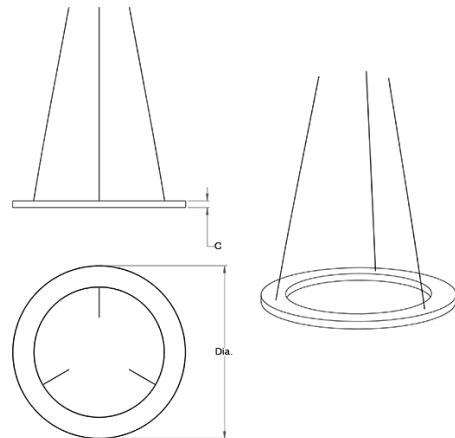

Installation instructions:

Suspended with 3 wire suspension kit (supplied) and powered via connection

To specify:

Large area suspended ring pendant with opal diffuser as per Tamlite Air range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.