

# ARCO

Linear LED suspended continuous modular system



5 YR

IP20



### Features:

- Modern stylish profile ideal for architects and designers
- Indirect and direct output continuous system
- White or silver grille optic also available
- Wide range of connection and suspension kits available
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 128 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser as standard
- Aluminium cross-blade louvre or polycarbonate grill for direct light content
- Supplied as standard with neutral white (4000K) LED

### Options:

- V202 - Integral PIR device
- V203 - Integral PIR dimming device
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- CW - Cool white (5000K)

# ARCO

Linear LED suspended continuous modular system

### Order Codes


All dimensions are in millimetres

| Order code    | Description | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|---------------|-------------|-------------|-----------------|-----------------|-------------|
| ARC22R120OPNW | 10W - 4000K | 1200        | 10              | 120             | 3.80        |
| ARC22R180OPNW | 15W - 4000K | 1800        | 15              | 120             | 3.80        |
| ARC42R210OPNW | 17W - 4000K | 2100        | 17              | 124             | 4.90        |
| ARC42R350OPNW | 28W - 4000K | 3500        | 28              | 125             | 4.90        |
| ARC52R410OPNW | 32W - 4000K | 4100        | 32              | 128             | 5.75        |
| ARC52R700OPNW | 57W - 4000K | 7000        | 57              | 123             | 5.75        |

### Dimensions

All dimensions are in millimetres

| Order code    | A    | B   | C  |
|---------------|------|-----|----|
| ARC22R120OPNW | 1520 | 140 | 65 |
| ARC22R180OPNW | 1520 | 140 | 65 |
| ARC42R210OPNW | 2120 | 140 | 65 |
| ARC42R350OPNW | 2120 | 140 | 65 |
| ARC52R410OPNW | 2420 | 140 | 65 |
| ARC52R700OPNW | 2420 | 140 | 65 |

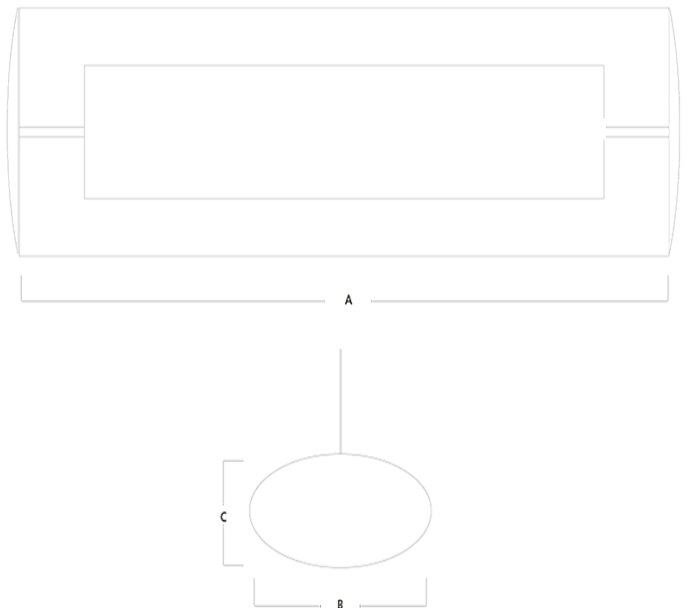

### Installation instructions:

Suspended via wire suspension kits and wired to 3 pole termination block

### To specify:

Linear continuous LED module system as per Tamlite ARCO LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.