

ARCO

Linear LED suspended continuous modular system



Features:

- Modern stylish profile ideal for architects and designers
- High performance LED modules and integral drivers
- Indirect and direct output continuous system
- White or silver grille optic also available
- Wide range of connection and suspension kits available
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 128 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Extruded aluminium body finished in white (RAL 9010)
- Opal PMMA diffuser as standard
- Aluminium cross-blade louvre or polycarbonate grill for direct light content
- Supplied with 2 rows of LED modules
- Supplied as standard with neutral white (4000K) LED

Options:

- V202 - Integral PIR device
- V203 - Integral PIR dimming device
- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- CW - Cool white (5000K)

ARCO

Linear LED suspended continuous modular system

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
ARC22R120OPNW	10W - 4000K	1200	10	120	3.8
ARC22R180OPNW	15W - 4000K	1800	15	120	3.8
ARC42R210OPNW	17W - 4000K	2100	17	124	4.9
ARC42R350OPNW	28W - 4000K	3500	28	125	4.9
ARC52R410OPNW	32W - 4000K	4100	32	128	5.75
ARC52R700OPNW	57W - 4000K	7000	57	123	5.75

Dimensions

All dimensions are in millimetres

Order code	A	B	C
ARC22R120OPNW	1520	140	65
ARC22R180OPNW	1520	140	65
ARC42R210OPNW	2120	140	65
ARC42R350OPNW	2120	140	65
ARC52R410OPNW	2420	140	65
ARC52R700OPNW	2420	140	65

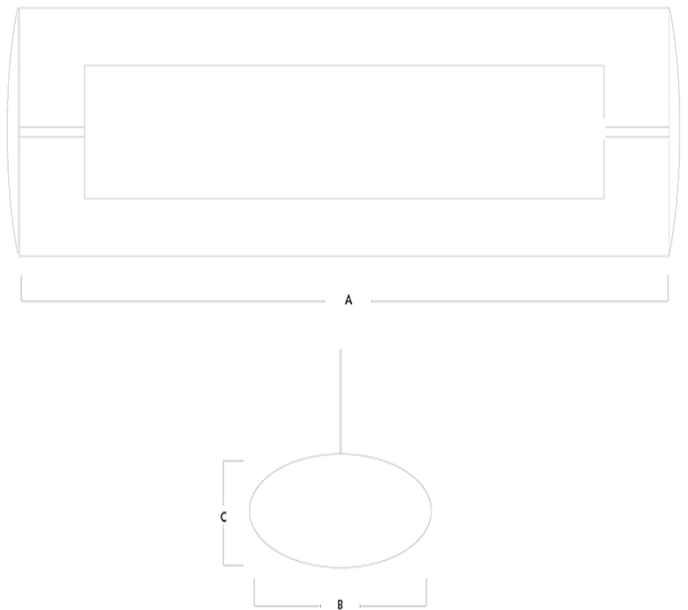

Installation instructions:

Suspended via wire suspension kits and wired to 3 pole termination block

To specify:

Linear continuous LED module system as per Tamlite ARCO LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.