

ASTRO

High output LED downlight



5 YR

IP54



Features:

High output LED downlight suitable for corridors and toilets

Available in 3 different outputs

Low glare opal diffuser

Gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 110 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body finished in white (RAL 9010)

Opal styrene diffuser

Remote driver

Supplied as standard with neutral white (4000K) LED

Options:

D - DALI dimming control gear

D3 - DALI self test

RM3 - Remote maintained 3 hours emergency

A3 - Emergency self test

WW - Warm white (3000K)

ASTRO

High output LED downlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TD-AST110NW	14W - 4000K	1400	14	100	0.77
TD-AST220NW	20W - 4000K	2200	20	110	0.77
TD-AST320NW	30W - 4000K	3000	30	100	0.84

Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
TD-AST110NW	45	230	205
TD-AST220NW	45	230	205
TD-AST320NW	45	230	205

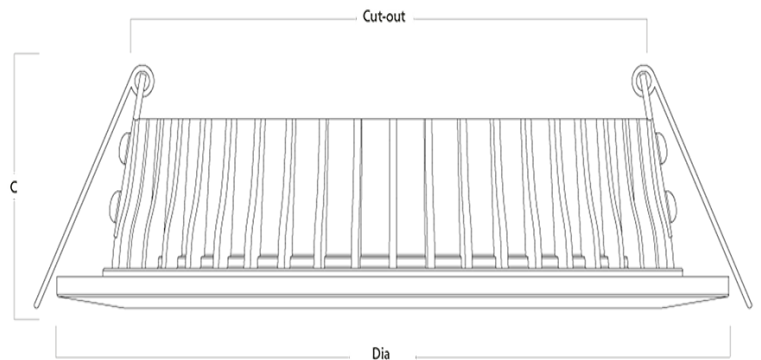

Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clips and wired to 3-way connection on driver

To specify:

High output LED downlight as per Tamlite ASTRO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.