

ASTRO

High output LED downlight



Features:

- Low glare opal diffuser, ideal for corridors and toilets
- Available in 2 different outputs
- High quality construction for reliability and performance
- Ideal replacement for 26-32W PL-T downlights
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 110 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body finished in white (RAL 9010)
- Opal styrene diffuser
- Remote driver
- Supplied as standard with neutral white (4000K) LED

Options:

- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- RM3 - Remote maintained 3 hour emergency
- WW - Warm white (3000K)

ASTRO

High output LED downlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TD-AST220NW	20W - 4000K	2200	20	110	0.77
TD-AST320NW	30W - 4000K	3000	30	100	0.84

Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
TD-AST220NW	45	230	205
TD-AST320NW	45	230	205

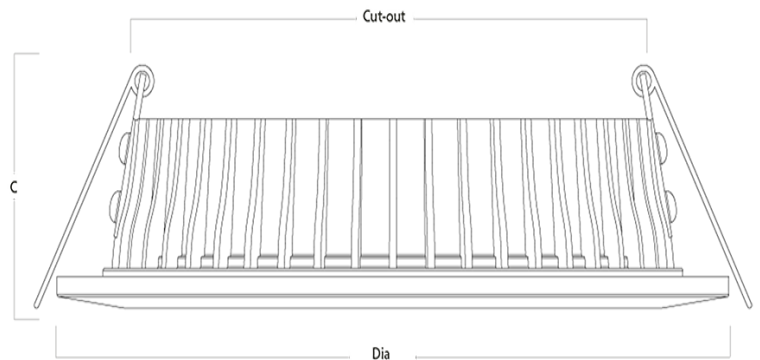

Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clips and wired to 3-way connection on driver

To specify:

High output LED downlight as per Tamlite 'ASTRO' range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.