

# AXIS

Recessed LED module with profiled diffuser optic



5 YR

IP20



### Features:

Recessed LED module with profiled diffuser optic

Tamlite I-Tech diffuser designed for low glare reduction to EN-12464

Centre nanoprism optic - TP(b) rated

Suitable for use in VDU areas such as offices, schools and universities

3 different outputs for low, medium or high spacing layouts

Gear options of DALI, Emergency and Ready2Mains dimming available

CRI: Ra>80

Up to 125 lumens per Watt efficacy

>50,000 hours lifetime (L80/B10)

### Construction:

Steel body finished in white (RAL 9016)

Opal polycarbonate diffuser

Supplied as standard with neutral white (4000K) LED

### Options:

D - Dimmable DALI

D3 - DALI self test

M3 - 3 hours integrated emergency

A3 - Emergency self test

# AXIS

Recessed LED module with profiled diffuser optic

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
AX66220NW	18W - 4000K	2200	18	122	4.35
AX66300NW	24W - 4000K	3000	24	125	4.35
AX66450NW	38W - 4000K	4500	38	118	4.35

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
AX66220NW	595	595	118
AX66300NW	595	595	118
AX66450NW	595	595	118

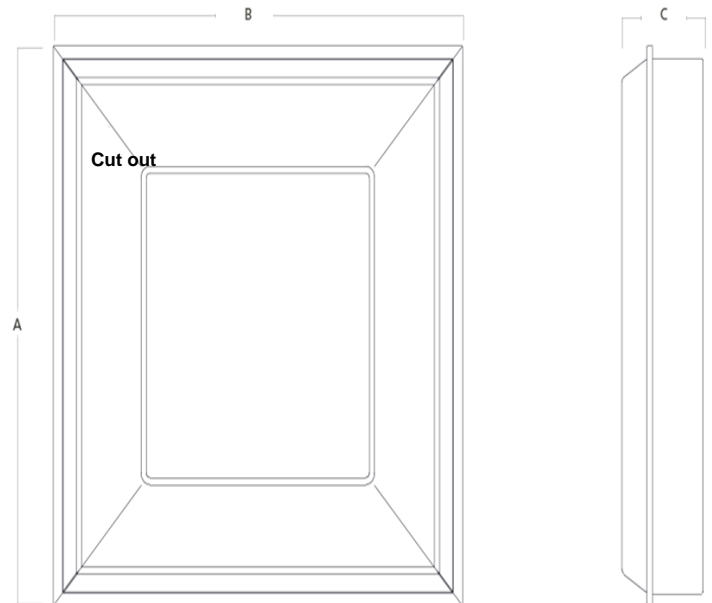

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Frame available for plasterboard mount

### To specify:

Recessed LED module with glare control diffuser as per Tamlite AXIS range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.