

CAPITAL P

Recessed module for Plasterboard type ceilings



Features:

Recessed module for plasterboard ceilings

Also available for lay-in, Burgess and SAS type ceilings

I-Tech microprism optic provides excellent glare control with BS EN-12464 compliance

Suitable for office installations and general or task area lighting

Available in 3 standard sizes with bespoke, retro-fit versions available

Gear options of DALI and Emergency

Air handling for 40 litres/second option

CRI: Ra>80

Up to 120 lumens per Watt efficacy

50,000 hours lifetime

Construction:

Pressed steel body

Prismatic polycarbonate diffuser

Supplied as standard with neutral white (4000K) LED

Options:

D - Dimmable DALI

M3 - 3 hours integrated emergency

A3 - Emergency self test

D3 - DALI self test

CAPITAL P

Recessed module for Plasterboard type ceilings

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
CPP66MP300NW	25W - 4000K Microprism diffuser	3000	25	120	7.03
CPP123MP300NW	28W - 4000K Microprism diffuser	3000	28	107	8.19

Dimensions

All dimensions are in millimetres

Order code	A	B	C
CPP66MP300NW	620	620	108
CPP123MP300NW	1220	320	108

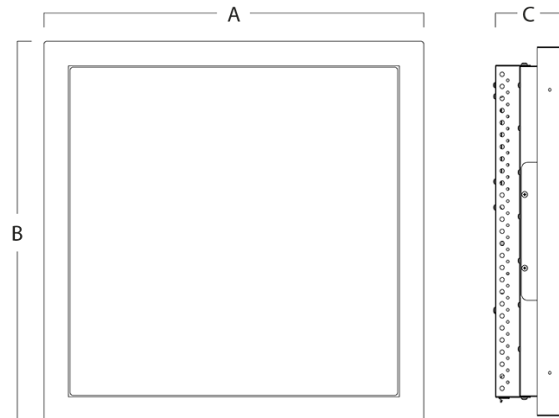

Installation instructions:

[View or download the ceiling compatibility guide](#)

To specify:

Recessed module for Plasterboard type ceilings as per Tamlite CAPITAL P range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.