

CHURCHILL

Antique style LED post top lantern



5 YR

IP66



Features:

Suitable for pedestrianised areas or footpaths

Also available with Photocell

Windage = 0.10m²

Wide range of column or wall mount brackets available

CRI: Ra>80

Up to 91 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Polycarbonate body finished in black (RAL 9005)

Vertical mounting on 60mm dia. spigot

Clear PMMA lens

Integral driver

Supplied as standard with cool white (5000K)

Options:

PC - Photocell

WW - Warm white (3000K)

NW - Neutral white (4000K)

CHURCHILL

Antique style LED post top lantern

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
DL320CW	35W - 5000K	3200	35	91	5.20

Dimensions

All dimensions are in millimetres

Order code	A	B	C
DL320CW		375	670

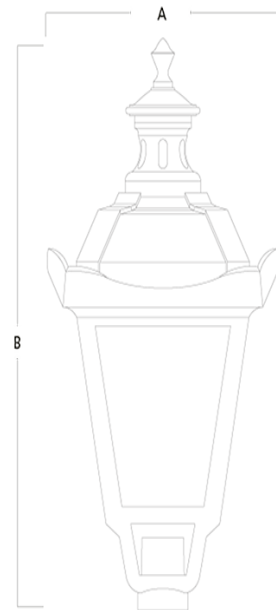

Installation instructions:

Post top mount onto column via 60mm dia spigot and wired to 3 pole terminal block

To specify:

LED Post-top lantern as per Tamlite Churchill LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.