

# CIRCLIGHT

LED circular domed profile bulkhead



### Features:

- General purpose IP65 weatherproof luminaire
- Wide range of interior and exterior applications
- Integral emergency option
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 82 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Polycarbonate body finished in white (RAL 9016)
- Opal PMMA diffuser
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test
- TS - Emergency test switch
- NL - Night-light

# CIRCLIGHT

LED circular domed profile bulkhead

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
CLD36017LEDNW	17W - 4000K	1400	17	82	1.6

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
CLD36017LEDNW	140	360

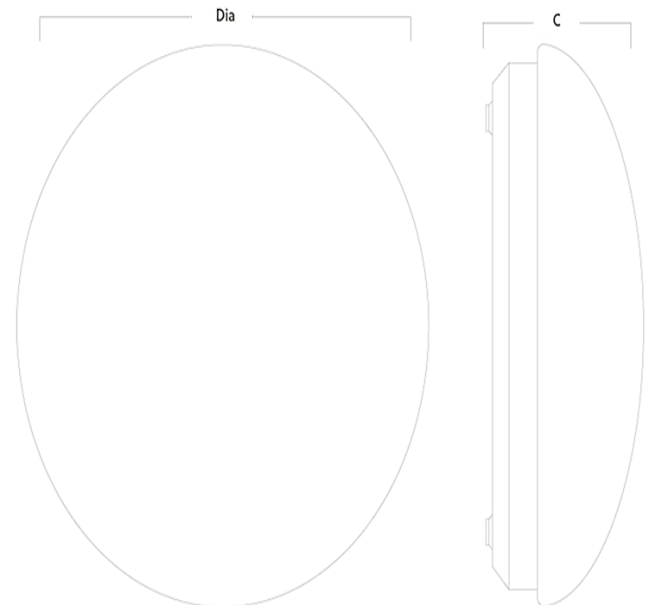

### Installation instructions:

Wall or ceiling mount via 20mm rear entry hole and wired via rear cable entry

### To specify:

White polycarbonate weatherproof bulkhead as per Tamlite CIRCLIGHT range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.