

CITY BL

Extruded aluminium LED bollard



5 YR

IP65



Features:

Ideal for pathways and pedestrian areas

Symmetric distribution

Surface mounted utilising J bolts

Spacing up to 10 metres @5 lux

CRI: Ra>80

Up to 100 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Extruded aluminium body finished in black (RAL 9005)

Integral driver

Supplied as standard with neutral white (4000K) LED

Options:

No options available

CITY BL

Extruded aluminium LED bollard

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
CBL90NW	9W - 4000K	900	9	100	5.7

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
CBL90NW	1000	180

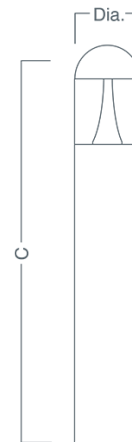

Installation instructions:

Surface mount utilising J bolt assembly and wired via a three way terminal block. Please ensure correct ground preparations are applied before installation

To specify:

LED bollard as per Tamlite CITY BL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.