

CITY RL

High performance road lantern



Features:

- High performance road lantern for use on minor roads
- Modern stylish design
- Available in 5 outputs and 2 body sizes
- Available in grey (RAL9006) or black (RAL9005)
- Ideal for mounting heights up to 12M
- Adjustable spigot hinge for tilting to 15°
- CRI: Ra>80
- Up to 149 lumens per Watt efficacy
- 84,000 hours lifetime (L80/B20)

Construction:

- Die-cast aluminium body
- Clear polycarbonate lens with road (T3) optic
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- PC - Photocell
- B - Black (RAL 9005)

CITY RL

High performance road lantern

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
CTRT3330NWG	23W - 4000K - Grey	3300	23	143	5.36
CTRT3280WWG	23W - 3000K - Grey	2800	23	122	5.36
CTRT3570NWG	40W - 4000K - Grey	5700	40	143	5.36
CTRT3520WWG	40W - 3000K - Grey	5200	40	130	5.36
CTRT3860NWG	61W - 4000K - Grey	8600	61	141	5.36
CTRT3810WWG	61W - 3000K - Grey	8100	61	133	5.36
CTRT31310NWG	88W - 4000K - Grey	13100	88	149	6.30
CTRT31260WWG	88W - 3000K - Grey	12600	88	143	6.30
CTRT31730NWG	117W - 4000K - Grey	17300	117	148	6.30
CTRT31630WWG	117W - 3000K - Grey	16300	117	139	6.30

Dimensions

All dimensions are in millimetres

Order code	A	B	C
CTRT3330NWG	595	230	140
CTRT3280WWG	595	230	140
CTRT3570NWG	595	230	140
CTRT3520WWG	595	230	140
CTRT3860NWG	595	230	140
CTRT3810WWG	595	230	140
CTRT31310NWG	710	285	145
CTRT31260WWG	710	285	145
CTRT31730NWG	710	285	145
CTRT31630WWG	710	285	145

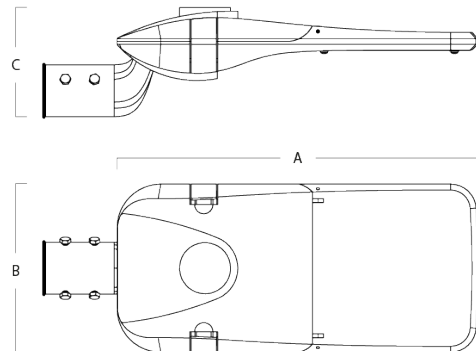

Installation instructions:

Fixed via 42 - 60mm dia. Vertical spigot or side entry spigot and wired via 3-way connection block

To specify:

Minor road lantern as per Tamlite CITY RL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.