

CITY SL

High output exterior LED spotlight



5 YR

IP65



Features:

- Suitable for architectural and building illumination
- 20° beam angle as standard
- Built for exterior fit-and-forget installations
- CRI: Ra>90
- Up to 75 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Aluminium body finished in grey (RAL 9006)
- Supplied with 2 x 2.0m H05RN 2-core, 1.0 mm cables and PG-9 PVC cable gland
- 4mm tempered glass
- Supplied as standard with neutral white (4000K) LED

Options:

No options available

CITY SL

High output exterior LED spotlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TA2020SL12NW	12W - 4000K	890	12	74	2.00
TA2020SL24NW	24W - 4000K	1800	24	75	2.80

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
TA2020SL12NW	145	151
TA2020SL24NW	146	177

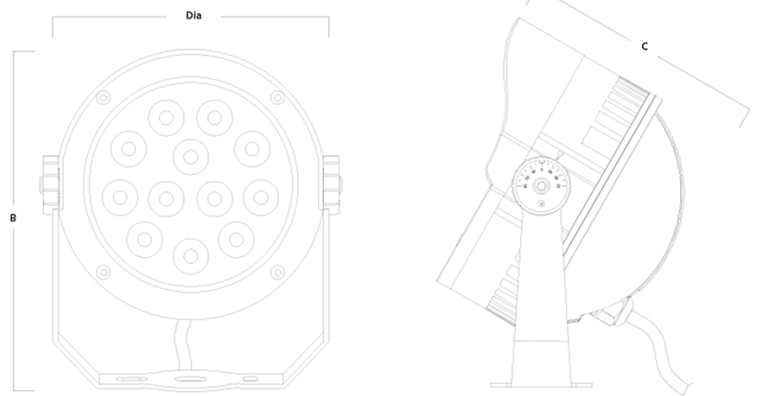

Installation instructions:

Surface mount via die-cast aluminium bracket

To specify:

LED Spotlight as per Tamlite CITY SL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.