

DELTA

LED circular bulkhead



Features:

- IP65 weatherproof bulkhead
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 53 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Polycarbonate body finished in white
- Opal diffuser
- Supplied as standard with neutral white (4000K) LED

Options:

- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test
- NL - Night-light

DELTA

LED circular bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
DEL17LEDNW	17W - 4000K	900	17	53	2

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
DEL17LEDNW	110	340

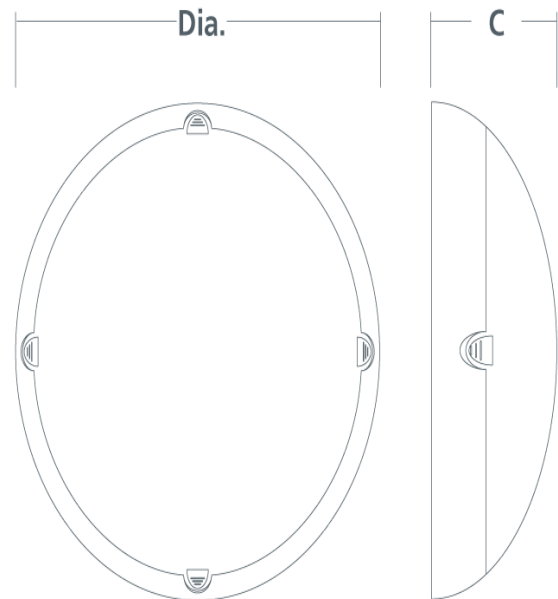

Installation instructions:

Wall or ceiling mount via 20mm rear entry holes and wired via rear cable entry

To specify:

Circular LED bulkhead as per Tamlite "DELTA"™ range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.