

DELTA

LED circular bulkhead



5 YR

IP65



Features:

IP65 weatherproof bulkhead

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 53 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Polycarbonate body finished in white

Opal diffuser

Supplied as standard with neutral white (4000K) LED

Options:

HFS - Microwave movement sensor

HFD - Digital dimmable version

HFSD - Dimmable microwave movement sensor

D - DALI dimming control gear

D3 - DALI self test

M3 - 3 hours integrated emergency

A3 - Emergency self test

NL - Night-light

DELTA

LED circular bulkhead

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
DEL17LEDNW	17W - 4000K	900	17	53	2.00

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
DEL17LEDNW	110	340

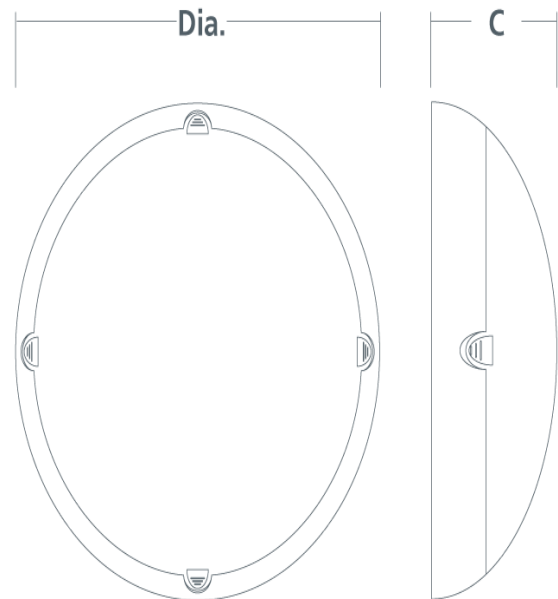

Installation instructions:

Wall or ceiling mount via 20mm rear entry holes and wired via rear cable entry

To specify:

Circular LED bulkhead as per Tamlite "DELTA"™ range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.