

ELEGANCE

Decorative circular bulkhead with LED array



5 YR

IP20



Features:

- Ideal for general commercial areas
- Low energy consumption increasing maintenance intervals
- Available in 3 colour options (white as standard)
- Integral emergency option
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 76 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016)
- Opal polycarbonate diffuser
- Integral driver
- Supplied as standard with neutral white (4000K) LED

Options:

- HFS - Microwave movement sensor
- HFD - Digital dimmable version
- HFSD - Dimmable microwave movement sensor
- D - DALI dimming control gear
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- WW - Warm white (3000K)
- NL - Night-light
- PB - Polished brass
- PC - Polished chrome
- O - Opal diffuser
- PRIS - Prismatic diffuser

ELEGANCE

Decorative circular bulkhead with LED array

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EL17LED1SNW	17W - 4000K	1300	17	76	1.3
EL17LED2LNW	17W - 4000K	1000	17	59	2.1
EL21LED3XLNW	22W - 4000K	1500	22	68	3.1
EL21LED2LNW	22W - 4000K	1500	22	68	2.2

Dimensions

All dimensions are in millimetres

Order code	C	Diameter
EL17LED1SNW	93	330
EL17LED2LNW	93	430
EL21LED3XLNW	93	525
EL21LED2LNW	93	430

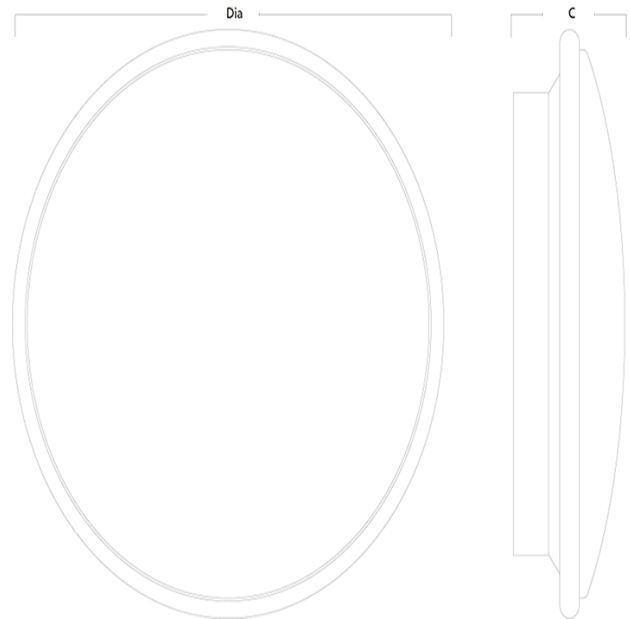

Installation instructions:

Wall or ceiling mount via 20mm rear entry holes and wired via rear cable entry

To specify:

Shallow circular bulkhead as per Tamlite ELEGANCE range supplied with lamp

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.