

# ELEGANCE PLUS

Architectural circular LED bulkhead



5 YR

IP20



### Features:

Polycarbonate version of popular Elegance range

Choice of 6 body colour options

Coloured polycarbonate base provides decorative architectural effect on translucent based models

Integral emergency option

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 59 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

### Construction:

Polycarbonate body finished in white

Opal polycarbonate diffuser

Integral driver

Supplied as standard with neutral white (4000K) LED

### Options:

HFS - Microwave movement sensor

HFD - Digital dimmable version

HFSD - Dimmable microwave movement sensor

DALI - DALI dimming control gear

M3 - 3 hours integrated emergency

AST - Emergency self test

WW - Warm white (3000K)

NL - Night-light

PB - Polished brass

PC - Polished chrome

O - Opal diffuser

PRIS - Prismatic diffuser

# ELEGANCE PLUS

Architectural circular LED bulkhead

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
PEL17LED2LNW	17W - 4000K	1000	17	59	1.45

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
PEL17LED2LNW	110	420

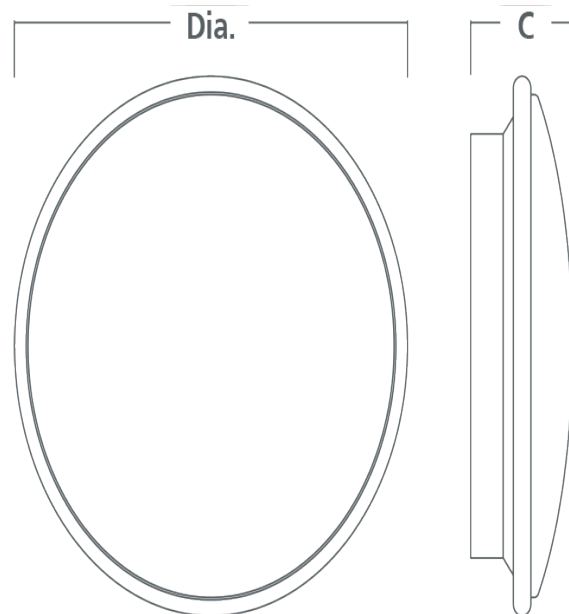

### Installation instructions:

Wall or ceiling mount via 20mm rear entry holes and wired via rear cable entry

### To specify:

Shallow circular bulkhead as per Tamlite ELEGANCE range supplied with lamp

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.