

# EMLED S

Surface mounted emergency LED downlight



3 YR

IP20



### Features:

- High output LED downlight for escape routes
- Virtually service free emergency lighting
- Easy to install with simple connection wiring
- High output 1W LED chip
- Choice of open area, narrow or corridor optic
- Very low energy consumption
- Internal mains connection
- 30,000 hours lifetime (L70/B50)

### Construction:

- Polycarbonate body finished in white
- Integral driver
- Supplied as standard with cool white (5500K) LED

### Options:

- No options available

# EMLED S

Surface mounted emergency LED downlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
SEMLED1W	1W 5500K Wide beam	120	1		0.4
SEMLED1WNB	1W 5500K Narrow beam	118	1		0.4
SEMLED1WC	1W 5500K Corridor	105	1		0.4

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
SEMLED1W	170	120	
SEMLED1WNB	170	120	
SEMLED1WC	170	120	

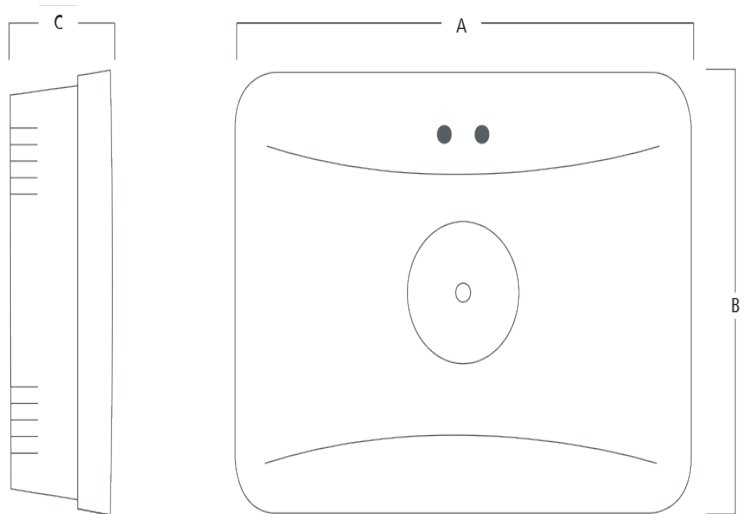

### Installation instructions:

Wall / ceiling fix via rear-mounted fixing and cable entry

### To specify:

Surface mounted compact LED emergency downlight as per Tamlite LEDLUX range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.