

# EURO LED

Slimline recessed LED downlight



3 YR

IP40



### Features:

Recessed compact LED downlight supplied with remote driver  
Available in 4 different sizes  
Low energy solution  
RGB and Warm white (3000K) also available  
RGB compatible with STARLITE TOUCH control system  
Gear options including dimmable, DALI and emergency available  
CRI: Ra>80  
Up to 88 lumens per Watt efficacy  
50,000 hours lifetime (L70/B50)

### Construction:

Die-cast aluminium body  
Supplied as standard with neutral white (4000K) LED

### Options:

No options available

# EURO LED

Slimline recessed LED downlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EURO12LEDORGB	12W - RGB		4	88	0.23
EURO19LEDORGB	19W - RGB		5	88	0.23
EURO8LEDONW	8W - 4000K	600	8	75	0.23
EURO12LEDONW	12W - 4000K	820	12	69	0.52
EURO19LEDONW	19W - 4000K	1500	19	79	0.74
EURO24LEDONW	24W - 4000K	2000	24	84	0.98

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
EURO12LEDORGB	26	173	162
EURO19LEDORGB	26	240	223
EURO8LEDONW	26	120	108
EURO12LEDONW	26	173	162
EURO19LEDONW	26	240	223
EURO24LEDONW	26	298	282

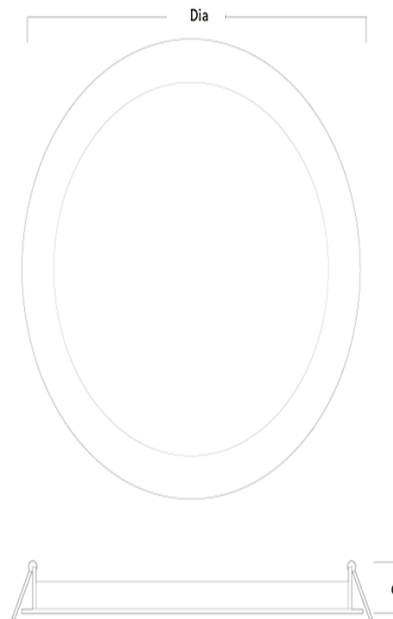

### Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clips

### To specify:

Recessed compact LED downlight as per Tamlite EURO LED range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.