


# EUROLUX

LED emergency bulkhead

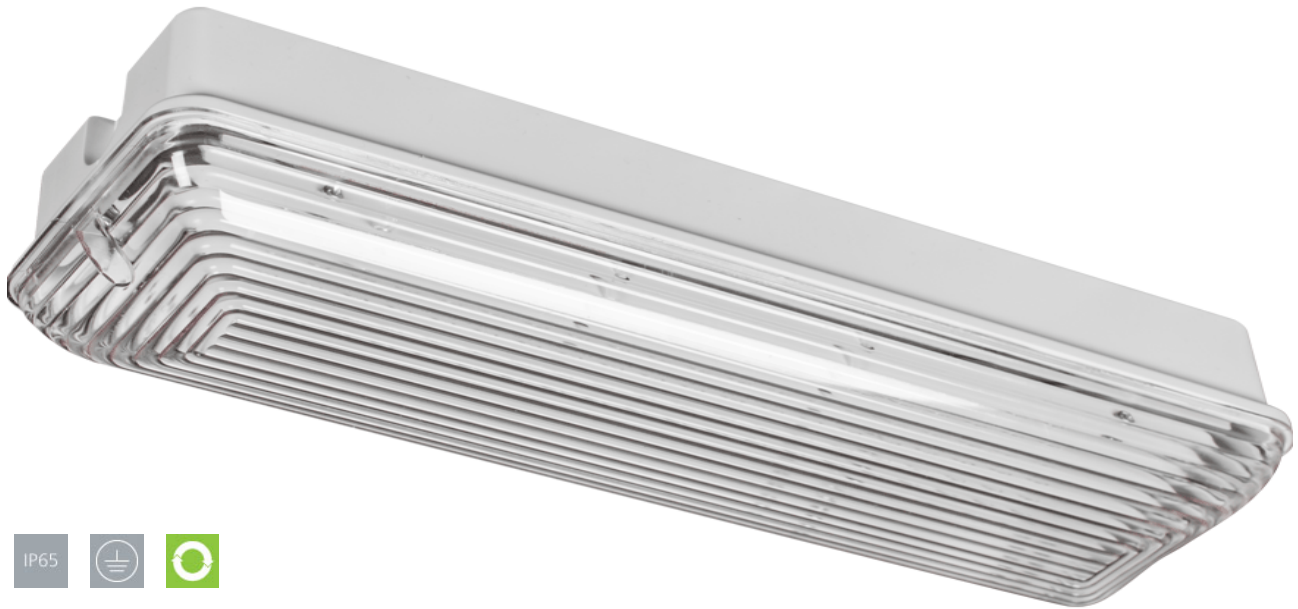

### Features:

- High quality lamp and gear
- High lumen output (75 lumens)
- Low maintenance LED
- Good spacing performance
- Versatile emergency bulkhead
- Slave options for central battery system
- Integrated battery charge indicator
- High impact vandal resistant
- 30,000 hours lifetime (L70/B50)

### Construction:

- White polycarbonate body
- Clear polycarbonate diffuser
- Hinged gear tray
- Large terminal to loop 2.5mm\_cable
- Quality Nickel Cadmium (NiCd) batteries
- Designed for multiple cable entry for through wiring and BESA box entry
- Supplied as standard with daylight (6000K) LED

### Options:

- AST - Emergency self test
- TS - Emergency test switch
- B - Black (RAL 9005)

# EUROLUX

LED emergency bulkhead

### Order Codes


All dimensions are in millimetres

Order code	Description	Weight (kg)
EURO8S3	2 x 8W T5	1.45
EURO8NM3	1 x 8W T5	1.1
EURO8M3	1 x 8W T5	1.4
EUROLED10M3	3W - 6000K Maintained	0.67

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
EURO8S3	384	114	92
EURO8NM3	384	114	92
EURO8M3	384	114	92
EUROLED10M3	384	92	114



### Installation instructions:

Wall or ceiling fix via rear-mounted fixing and cable entry

### To specify:

Polycarbonate IP65 LED emergency bulkhead as per Tamlite EUROLUX range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.