

EXCEL

T5 modular range



1 YR

IP20



Features:

Low profile T5 module range

Designed for commercial office installations

Integral VDT louvre

Recessed, semi-recessed and surface versions available

Construction:

Steel body finished in white (RAL 9016)

Polished Aluminium VDT (LG7 2005) louvre

Perforated panels provide increased downward light output

Options:

1

HFR - High frequency analogue dimming

HFD - Digital dimmable version

M3 - 3 hours integrated emergency

AST - Emergency self test

EXCEL

T5 modular range

Order Codes


All dimensions are in millimetres

| Order code | Description | Weight (kg) |
|------------|-------------|-------------|
| SOLR228 | 2 x 28W T5 | 4.3 |
| SOLR328 | 3 x 28W T5 | 7.8 |
| SOLR414 | 4 x 14W T5 | 4 |
| SOLR214 | 2 x 14W T5 | 2.5 |
| SOLR314 | 3 x 14W T5 | 3.5 |

Dimensions

All dimensions are in millimetres

| Order code | A | B | C |
|------------|------|-----|----|
| SOLR228 | 1195 | 595 | 56 |
| SOLR328 | 1195 | 595 | 56 |
| SOLR414 | 595 | 595 | 56 |
| SOLR214 | 595 | 595 | 56 |
| SOLR314 | 595 | 595 | 56 |

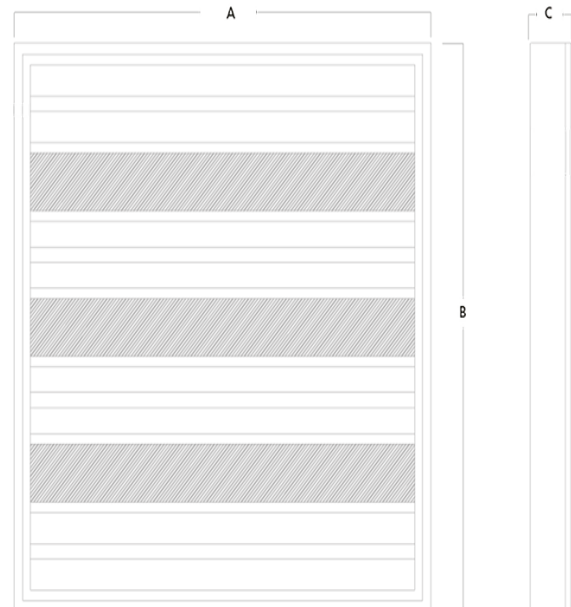

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount

To specify:

Recessed T5 module as per Tamlite EXCEL range supplied with louvre and lamps

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.