

EXCEL

T5 modular range



1 YR

IP20



Features:

- Low profile T5 module range
- Designed for commercial office installations
- Integral VDT louvre
- Recessed, semi-recessed and surface versions available

Construction:

- Steel body finished in white (RAL 9016)
- Polished Aluminium VDT (LG7 2005) louvre
- Perforated panels provide increased downward light output

Options:

- 1
- HFR - High frequency analogue dimming
- HFD - Digital dimmable version
- M3 - 3 hours integrated emergency
- AST - Emergency self test

EXCEL

T5 modular range

Order Codes


All dimensions are in millimetres

Order code	Description	Weight (kg)
SOLR228	2 x 28W T5	4.3
SOLR328	3 x 28W T5	7.8
SOLR414	4 x 14W T5	4
SOLR214	2 x 14W T5	2.5
SOLR314	3 x 14W T5	3.5

Dimensions

All dimensions are in millimetres

Order code	A	B	C
SOLR228	1195	595	56
SOLR328	1195	595	56
SOLR414	595	595	56
SOLR214	595	595	56
SOLR314	595	595 </td <td>56</td>	56

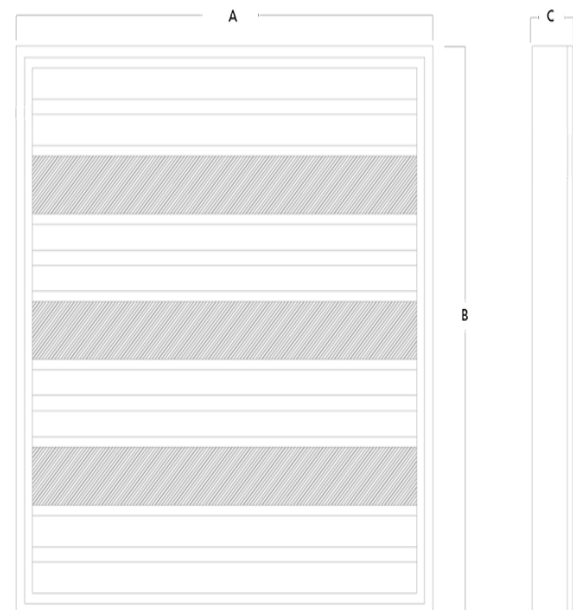

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Brackets available for plasterboard mount

To specify:

Recessed T5 module as per Tamlite EXCEL range supplied with louvre and lamps

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.