

EXP RL

LED road lantern



5 YR

IP65



Features:

- High output Osram LED chips
- Available in 60, 90 and 120W versions
- Unique heat sink technology for optimal thermal management
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 74 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body finished in satin aluminium
- Side or top entry spigot (EXP60RL,50-60mm), (EXP90RL/120RL 60-76mm)
- Supplied as standard with neutral white (4000K) LED

Options:

No options available

EXP RL

LED road lantern

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXP60RLNW	60W - 4000K	4460	60	74	9.80
EXP90RLNW	90W - 4000K	6280	90	70	14.30
EXP120RLNW	120W - 4000K	8779	120	73	14.60

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXP60RLNW	754	580	110
EXP90RLNW	879	360	120
EXP120RLNW	879	360	120

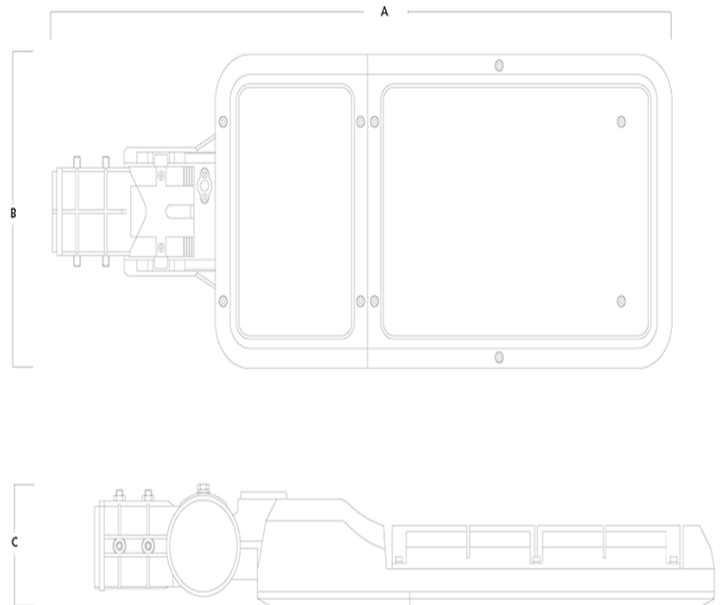

Installation instructions:

Fixed via 42 - 60m dia. Vertical spigot or side entry spigot and wired 3-way connection block

To specify:

High output LED road lantern as per Tamlite INFINITY RL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.