

EXP RL

LED road lantern



5 YR

IP65



Features:

High output Osram LED chips

Available in 60, 90 and 120W versions

Unique heat sink technology for optimal thermal management

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 74 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Die-cast aluminium body

Satin aluminium paint finish

Side or top entry spigot (EXP60RL,50-60mm), (EXP90RL/120RL 60-76mm)

Supplied as standard with neutral white (4000K) LED

Options:

No options available

EXP RL

LED road lantern

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXP60RLNW	60W - 4000K	4460	60	74	9.8
EXP90RLNW	90W - 4000K	6280	90	70	14.3
EXP120RLNW	120W - 4000K	8779	120	73	14.6

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXP60RLNW	754	580	110
EXP90RLNW	879	360	120
EXP120RLNW	879	360	120

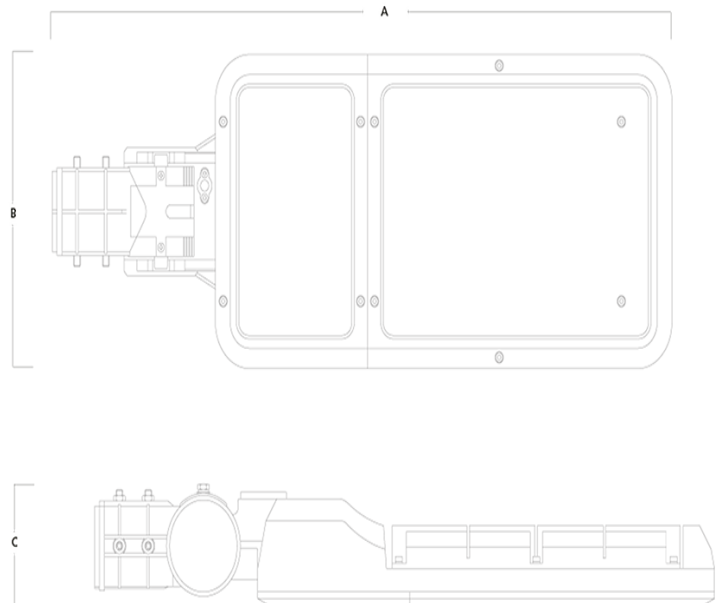

Installation instructions:

Fixed via 42 - 60mm dia. Vertical spigot or side entry spigot and wired 3-way connection block

To specify:

High output LED road lantern as per Tamlite INFINITY RL range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.