

EXPLORER PRO

Asymmetric, low glare LED floodlight



5 YR

IP66



Features:

- Available in 7 different models
- Stirrup mount allows for column, bracket or ceiling fixing
- Asymmetric distribution reduces glare
- Suitable for ambient temperatures -20 to +40°C
- Easy access clips
- Dimmable versions on large body
- CRI: Ra>80
- Up to 121 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Die-cast aluminium body
- High quality toughened safety glass
- Fully integrated stainless steel and aluminium spring clips
- Cable gland in tear-proof polyamide M20x1.5 for cables 10-14mm dia.
- External screws in stainless steel
- Supplied as standard with neutral white (4000K) LED

Options:

- D - Dimmable DALI

EXPLORER PRO

Asymmetric, low glare LED floodlight

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXPPRO30NW	27W - 4000K	3100	27	115	2.40
EXPPRO40NW	39W - 4000K	4700	39	121	2.40
EXPPRO60NW	53W - 4000K	6000	53	113	2.40
EXPPRO80NW	78W - 4000K	7200	78	119	3.60
EXPPRO120NW	105W - 4000K	12000	105	114	3.60
EXPPRO220NW	212W - 4000K	17000	212	96	12.00
EXPPRO300NW	293W - 4000K	22000	293	96	12.00

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXPPRO30NW	319	265	85
EXPPRO40NW	319	265	85
EXPPRO60NW	319	265	85
EXPPRO80NW	319	400	85
EXPPRO120NW	319	400	85
EXPPRO220NW	501	562	98
EXPPRO300NW	501	562	98

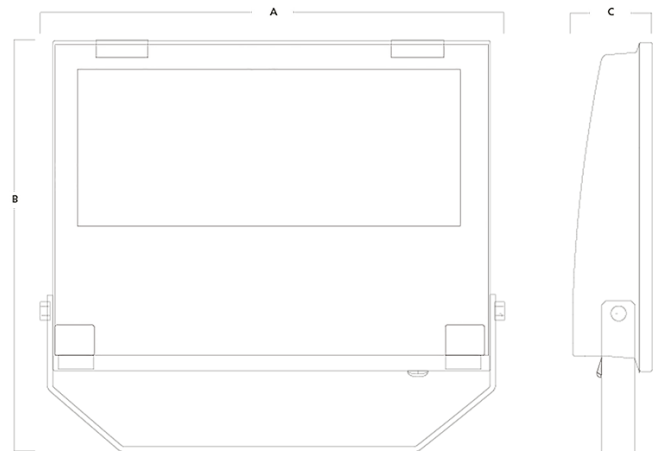

Installation instructions:

Fixed via stirrup bracket and wired via rear cable entry

To specify:

Asymmetric low glare LED floodlight as per Tamlite EXPLORER PRO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.