

EXPO

High output low bay/high bay



Features:

- High output for low bay or high bay applications
- Suitable for sports halls, industrial and warehousing areas up to 20 metres mounting height
- IP54 version also available
- Can save up to 60% energy
- Tamlite LG1 I-Tech optic designed for low glare
- TAMTEC LEDs
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 158 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white
- Supplied with integral driver(s)
- Supplied as standard with neutral white (4000K) LED

Options:

- V102 - Fixed output PIR sensor with photocell
- V103 - Dimmable remote PIR sensor
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test
- CW - Cool white (5000K)
- DL - Daylight (6500K)
- WB - Wide beam
- NB - Narrow beam

EXPO

High output low bay/high bay

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXP630NW	47W - 4000K	6400	47	136	4.10
EXP950NW	69W - 4000K	9500	69	138	4.40
EXP1200NW	76W - 4000K	12000	76	158	4.50
EXP1630NW	115W - 4000K	16300	115	142	4.50
EXP2100NW	156W - 4000K	21000	156	135	4.90
EXP2400NW	183W - 4000K	24000	183	131	4.90
EXP2600NW	204W - 4000K	26000	204	127	4.90
EXP2800NW	227W - 4000K	28000	227	123	4.90

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXP630NW	550	330	100
EXP950NW	550	330	100
EXP1200NW	550	330	100
EXP1630NW	550	330	100
EXP2100NW	550	330	100
EXP2400NW	550	330	100
EXP2600NW	550	330	100
EXP2800NW	550	330	100

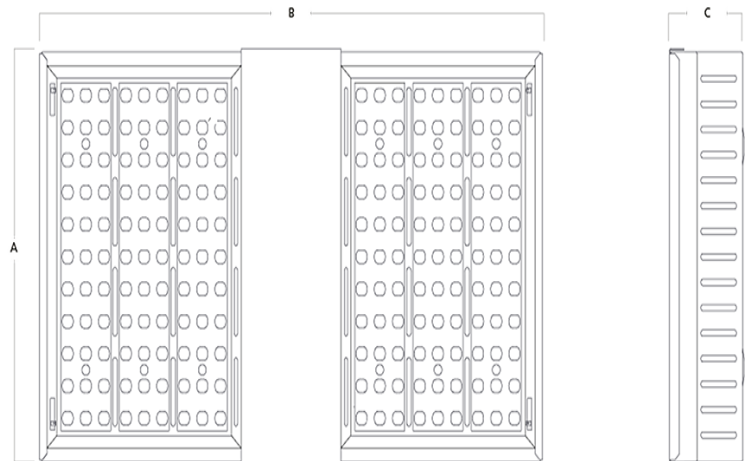

Installation instructions:

Fixed via rear suspension holes and wired via plug-in 3 pole terminal block

To specify:

High bay / low bay luminaire with 4 or 6 module array as per Tamlite EXPO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.