

EXPO WP

High output IP54 / IP65 LED Low bay/high bay



5 YR

IP54



Features:

- Weatherproof IP54 version of EXPO range with IP65 version also available
- Suitable for sports halls, industrial areas and warehousing up to 20m mounting height
- Can save up to 60% energy
- Tamlite I-Tech optic designed for low glare reduction to EN-12464
- Gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 134 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

Construction:

- Steel body finished in white (RAL 9016)
- Supplied with integral driver(s)
- Supplied as standard with neutral white (4000K) LED

Options:

- V102 - Fixed output PIR sensor with photocell
- V103 - Dimmable remote PIR sensor
- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- CW - Cool white (5000K)
- DL - Daylight (6500K)

EXPO WP

High output IP54 / IP65 LED Low bay/high bay

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXPWP630NW	57W - 4000K	6400	57	112	5.60
EXPWP950NW	83W - 4000K	9500	83	114	5.90
EXPWP1200NW	89W - 4000K	12000	89	134	6.00
EXPWP1630NW	127W - 4000K	16300	127	128	6.00
EXPWP2100NW	178W - 4000K	21000	178	118	6.40
EXPWP2400NW	183W - 4000K	24000	183	131	6.40
EXPWP2600NW	228W - 4000K	26000	228	114	6.40
EXPWP2800NW	255W - 4000K	28000	255	110	6.40

Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXPWP630NW	550	330	100
EXPWP950NW	550	330	100
EXPWP1200NW	550	330	100
EXPWP1630NW	550	330	100
EXPWP2100NW	550	330	100
EXPWP2400NW	550	330	100
EXPWP2600NW	550	330	100
EXPWP2800NW	550	330	100

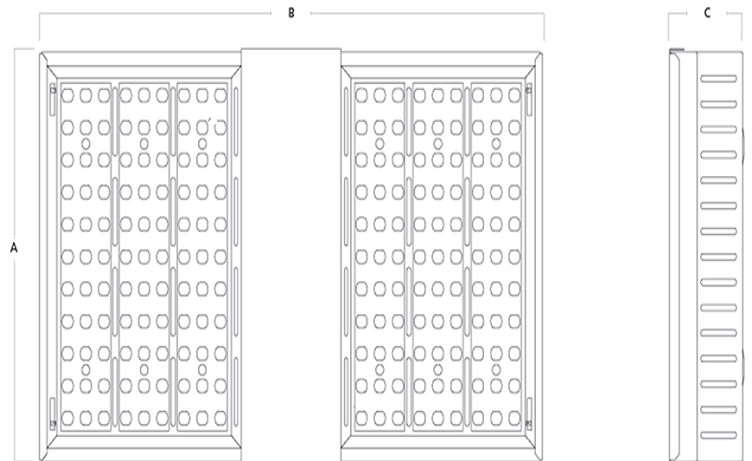

Installation instructions:

Fixed via rear suspension holes and wired via plug-in 3 pole terminal block

To specify:

Low bay luminaire with 4 or 6 module array as per Tamlite EXPO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.