

# GENEVA

Decorative wall mounted uplight



### Features:

- Modern aesthetic design
- Uplighter with low level downlight effect
- Full range of gear options including dimmable and DALI are available
- CRI: Ra>80
- Up to 89 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Steel body finished in white (RAL 9010)
- Electronic control gear
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFD - Digital dimmable version
- DALI - DALI dimming control gear
- WW - Warm white (3000K)

# GENEVA

Decorative wall mounted uplight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
GEN2500NW	28W - 4000K	2500	28	89	3.9

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
GEN2500NW	760	290	70

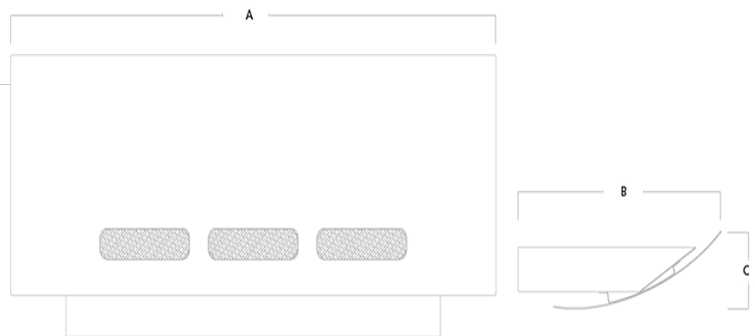

### Installation instructions:

Wall mounted via back plate screws

### To specify:

Wall mounted uplight as per Tamlite GENEVA range supplied with lamps and integral control gear

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.