

HILUX HX

Low profile LED low bay



Features:

Wide beam distribution suitable for sports halls, industrial areas and warehousing up to 20m mounting height

3 beam distributions for optimised performance

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 117 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Steel body finished in white

Aluminium MIRO 8510 reflector

Supplied as standard with neutral white (4000K) LED

Options:

V102 - Fixed output PIR sensor with photocell

HFD - Digital dimmable version

DALI - DALI dimming control gear

M3 - 3 hours integrated emergency

HILUX HX

Low profile LED low bay

Order Codes


All dimensions are in millimetres

| Order code | Description | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|--------------|--------------|-------------|-----------------|-----------------|-------------|
| HXLED24140NW | 120W - 4000K | 14000 | 120 | 117 | 4.9 |
| HXLED34210NW | 180W - 4000K | 21000 | 180 | 117 | 6.5 |
| HXLED44280NW | 240W - 4000K | 28000 | 240 | 117 | 8.0 |

Dimensions

All dimensions are in millimetres

| Order code | A | B | C |
|--------------|------|-----|----|
| HXLED24140NW | 1310 | 265 | 66 |
| HXLED34210NW | 1310 | 368 | 66 |
| HXLED44280NW | 1310 | 474 | 66 |

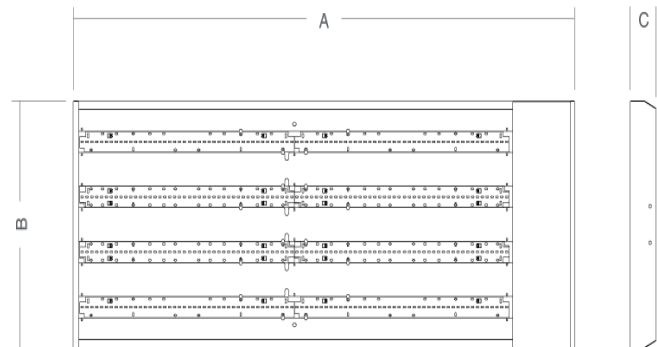

Installation instructions:

Suspension or surface mounting via fixing brackets

To specify:

Low profile LED luminaire as per Tamlite HILUX HX range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.