

HILUX HX

Low profile LED low bay



5 YR

IP20



Features:

Wide beam distribution suitable for sports halls, industrial areas and warehousing up to 20m mounting height

3 beam distributions for optimised performance

Gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 117 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Steel body finished in white

Aluminium MIRO 8510 reflector

Supplied as standard with neutral white (4000K) LED

Options:

V102 - Fixed output PIR sensor with photocell

HFD - Digital dimmable version

D - DALI dimming control gear

M3 - 3 hours integrated emergency

HILUX HX

Low profile LED low bay

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
HXLED24140NW	120W - 4000K	14000	120	117	4.9
HXLED34210NW	180W - 4000K	21000	180	117	6.5
HXLED44280NW	240W - 4000K	28000	240	117	8.0

Dimensions

All dimensions are in millimetres

Order code	A	B	C
HXLED24140NW	1310	265	66
HXLED34210NW	1310	368	66
HXLED44280NW	1310	474	66

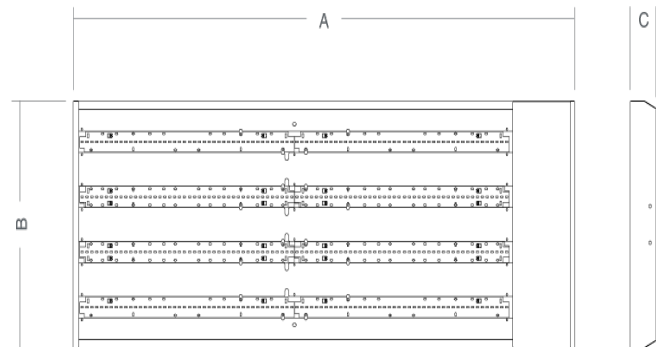

Installation instructions:

Suspension or surface mounting via fixing brackets

To specify:

Low profile LED luminaire as per Tamlite HILUX HX range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.