

# HORIZON

Recessed LED module with indirect/direct output



### Features:

Tamlite LG7 I-Tech diffuser optic designed for low glare applications  
Suitable for use in VDU areas such as offices, schools and universities  
3 different outputs for low, medium or high spacing layouts  
Driver gear options of DALI, Emergency and Ready2Mains dimming available  
CRI: Ra>80  
Up to 100 lumens per Watt efficacy  
50,000 hours lifetime (L70/B50)

### Construction:

Steel body finished in white (RAL 9016)  
Opal polycarbonate diffuser  
Supplied as standard with neutral white (4000K) LED

### Options:

HFD - Digital dimmable version  
DALI - DALI dimming control gear  
M3 - 3 hours integrated emergency  
WW - Warm white (3000K)  
CW - Cool white (5000K)

# HORIZON

Recessed LED module with indirect/direct output

### Order Codes


All dimensions are in millimetres

| Order code | Description | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|------------|-------------|-------------|-----------------|-----------------|-------------|
| TIDL36NW   | 30W - 4000K | 3200        | 30              | 107             | 4.5         |

### Dimensions

All dimensions are in millimetres

| Order code | A   | B   | C  |
|------------|-----|-----|----|
| TIDL36NW   | 595 | 595 | 70 |

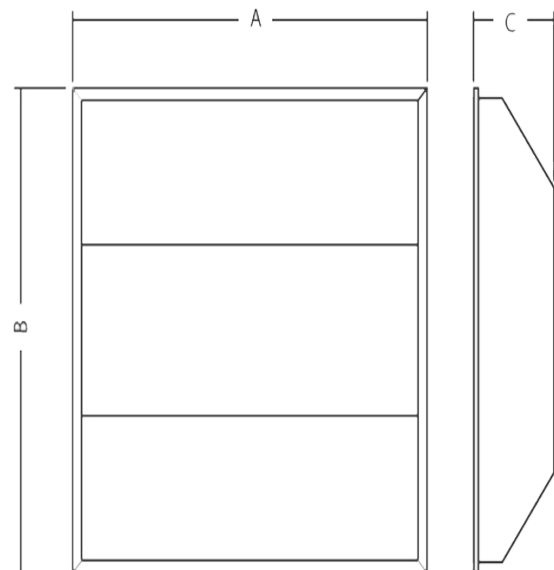

### Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Frame available for plasterboard mount

### To specify:

Recessed indirect/direct LED module with glare control diffuser as per Tamlite HORIZON range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.