

HORIZON

Recessed LED module with indirect/direct output



5 YR

IP20



Features:

Tamlite LG7 I-Tech diffuser optic designed for low glare applications
Suitable for use in VDU areas such as offices, schools and universities
3 different outputs for low, medium or high spacing layouts
Gear options of DALI, Emergency and Ready2Mains dimming available
CRI: Ra>80
Up to 100 lumens per Watt efficacy
50,000 hours lifetime (L70/B50)

Construction:

Steel body finished in white (RAL 9016)
Opal polycarbonate diffuser
Supplied as standard with neutral white (4000K) LED

Options:

HFD - Digital dimmable version
D - DALI dimming control gear
M3 - 3 hours integrated emergency
WW - Warm white (3000K)
CW - Cool white (5000K)

HORIZON

Recessed LED module with indirect/direct output

Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
TIDL36NW	30W - 4000K	3200	30	107	4.5

Dimensions

All dimensions are in millimetres

Order code	A	B	C
TIDL36NW	595	595	70

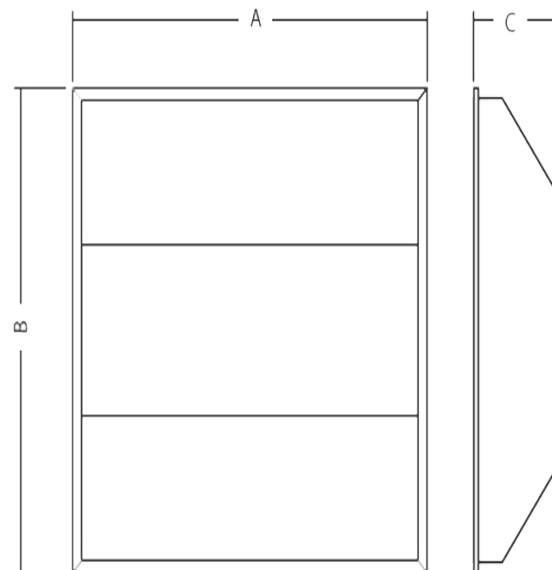

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Frame available for plasterboard mount

To specify:

Recessed indirect/direct LED module with glare control diffuser as per Tamlite HORIZON range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.