

HORIZON COMFORT

Recessed LED module with indirect/direct output



Features:

I-Tech' centre diffuser provides accurate light control

Suitable for use in VDU areas such as offices, schools and universities. High output version also ideal for Retail and Commercial areas.

3 different outputs for low, medium or high spacing layouts

Driver gear options of DALI, Emergency and Ready2Mains dimming available

CRI: Ra>80

Up to 122 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

Construction:

Steel body finished in white (RAL 9016)

Opal polycarbonate diffuser

Supplied as standard with neutral white (4000K) LED

Options:

HFD - Digital dimmable version

DALI - DALI dimming control gear

M3 - 3 hours integrated emergency

AST - Emergency self test

WW - Warm white (3000K)

CW - Cool white (5000K)

HORIZON COMFORT

Recessed LED module with indirect/direct output

Order Codes


All dimensions are in millimetres

| Order code | Description | Lumens (lm) | Total power (W) | Efficacy (lm/W) | Weight (kg) |
|-------------|-------------|-------------|-----------------|-----------------|-------------|
| TIDO66220NW | 18W - 4000K | 2200 | 18 | 122 | 5.4 |
| TIDO66300NW | 25W - 4000K | 3000 | 25 | 120 | 5.4 |
| TIDO66450NW | 39W - 4000K | 4500 | 39 | 115 | 5.4 |

Dimensions

All dimensions are in millimetres

| Order code | A | B | C |
|-------------|-----|-----|-----|
| TIDO66220NW | 595 | 595 | 135 |
| TIDO66300NW | 595 | 595 | 135 |
| TIDO66450NW | 595 | 595 | 135 |

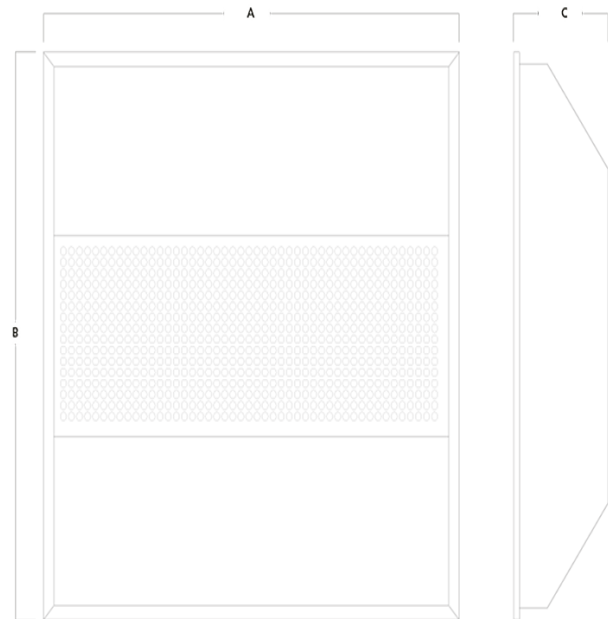

Installation instructions:

Recessed lay-in for exposed 25mm ceiling grid. Frame available for plasterboard mount

To specify:

Recessed indirect/direct LED module with glare control diffuser as per Tamlite HORIZON range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.