

# HURRICANE

Circular cast LED bulkhead



5 YR

IP65



### Features:

- Suitable for exterior use
- Plain, grille, eyelid and cross styles available
- Integral emergency option
- Gear options including dimmable and emergency are available
- CRI: Ra>80
- 50,000 hours lifetime (L70/B50)

### Construction:

- Aluminium body finished in black (RAL 9011)
- Opal polycarbonate diffuser
- Fitted with security screws as standard
- Supplied as standard with neutral white (4000K)

### Options:

- HFS - Microwave movement sensor
- HFSD - Dimmable microwave movement sensor
- D - DALI dimming control gear
- D3 - DALI self test
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- SG - Silver grey

# HURRICANE

Circular cast LED bulkhead

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
HURL171LEDNW	17W - 4000K - PLAIN	650	17	38	3.8
HURL172LEDNW	17W - 4000K - GRILLE	300	17	18	4.1
HURL173LEDNW	17W - 4000K - EYELID	350	17	21	4.1
HURL174LEDNW	17W - 4000K - CROSS	500	17	29	3.9

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
HURL171LEDNW	130	350
HURL172LEDNW	145	350
HURL173LEDNW	135	350
HURL174LEDNW	145	350

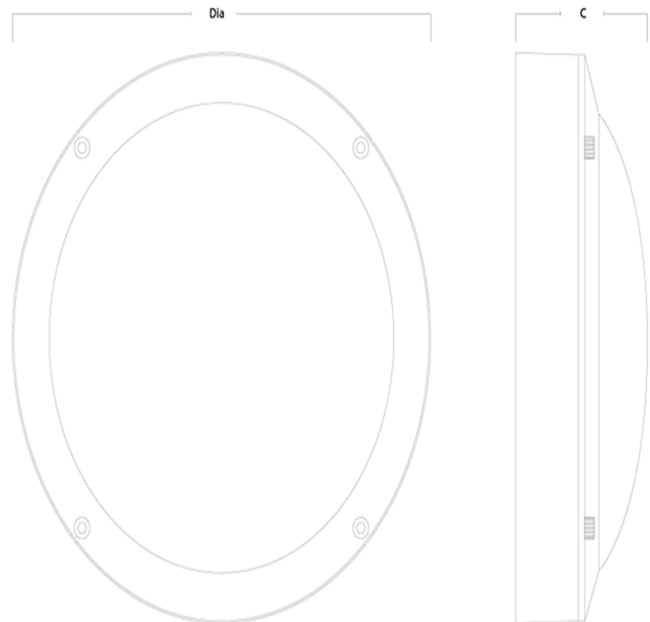

### Installation instructions:

Surface mount via rear fixing holes and wired via rear cable entry

### To specify:

Circular vandal resistant exterior bulkhead as per Tamlite HURRICANE range supplied with lamp

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.