

# HURRICANE HALO

Circular cast bulkhead



5 YR

IP65



### Features:

- Stylish bulkhead range with side light
- Eyelid and ring styles available
- Suitable for Vandal resistant areas
- Integral emergency option
- Full range of gear options including dimmable, DALI and emergency available
- CRI: Ra>80
- Up to 29 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Die-cast aluminium body finished in black (RAL 9004)
- Opal polycarbonate diffuser
- Fitted with tamper-proof security screws
- Supplied as standard with neutral white (4000K) LED

### Options:

- HFS - Microwave movement sensor
- HFSD - Dimmable microwave movement sensor
- DALI - DALI dimming control gear
- M3 - 3 hours integrated emergency
- AST - Emergency self test
- W - White

# HURRICANE HALO

Circular cast bulkhead

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
HH17RLEDNW	17W - 4000K - RING	500	17	29	3.4
HH17CLEDNW	17W - 4000K - EYELID	300	17	18	3.3

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter
HH17RLEDNW	125	325
HH17CLEDNW	125	325

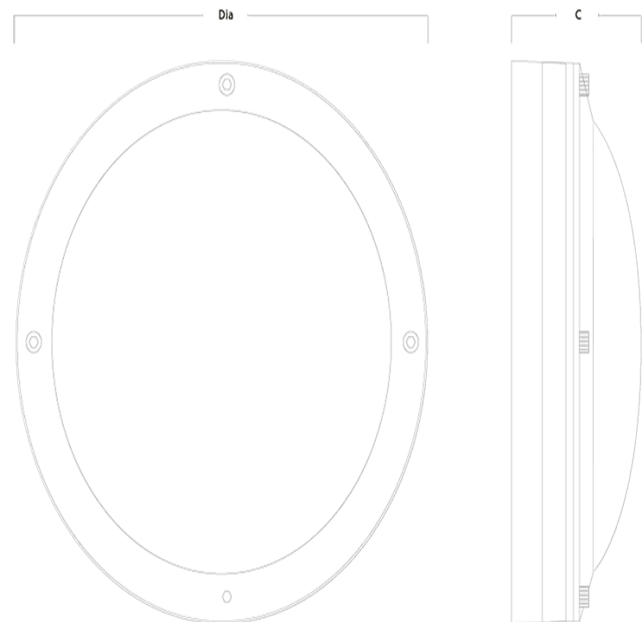

### Installation instructions:

Surface mount via rear fixing holes and wired via rear cable entry

### To specify:

Decorative exterior bulkhead as per Tamlite HURRICANE HALO range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.