

# IKON

Recessed circular downlight



5 YR

IP20



### Features:

- Recessed downlight with high output reflector
- Suitable for general and accent areas or retail applications
- Choice of 3 beam angles for spot, narrow and medium distributions
- Wide range of attachments and IP65 option
- Choice of 2 glass and 2 diffuser attachments
- CRI: Ra>80
- Up to 120 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

### Construction:

- Die-cast aluminium body finished in grey (RAL 9006)
- White trim (RAL 9016)
- Anodised polished aluminium reflector with matt or black option
- Remote driver
- Supplied as standard with neutral white (4000K) LED

### Options:

- D - Dimmable DALI
- RM3 - Remote maintained 3 hours emergency
- A3 - Emergency self test
- D3 - DALI self test
- WW - Warm white (3000K)
- MPRM - Micro-prism diffuser
- NB - Narrow beam
- SB - Spot beam

# IKON

Recessed circular downlight

### Order Codes



All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
IKN120MBNW	10W - 4000K	1200	10	120	1.15
IKN200MBNW	18W - 4000K	2000	18	111	1.15
IKN300MBNW	28W - 4000K	3000	28	107	1.15
IKN400MBNW	38W - 4000K	4000	38	105	1.15
IKN500MBNW	50W - 4000K	5000	50	100	1.15

### Dimensions

All dimensions are in millimetres

Order code	C	Diameter	Cut out
IKN120MBNW	116	200	169
IKN200MBNW	116	200	169
IKN300MBNW	116	200	169
IKN400MBNW	116	200	169
IKN500MBNW	116	200	169

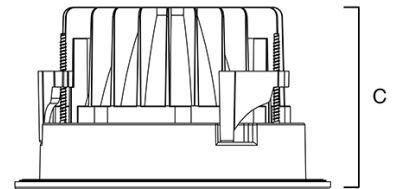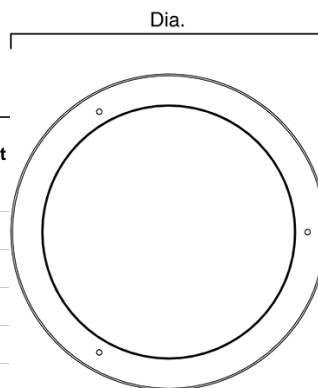

### Installation instructions:

Recessed into plasterboard or exposed grid ceiling via spring clips

### To specify:

Circular recessed downlight as per Tamlite IKON range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.