

# LOGIK

Recessed module for low glare and office areas



### Features:

- I-Tech multi-cell optic provides excellent glare control with BS EN-12464 compliance
- Suitable for office installations and general or task area lighting
- Outstanding uniformity with up to 3m spacings
- TP(a) rated optic
- Gear options of DALI and Emergency
- CRI: Ra>80
- Up to 130 lumens per Watt efficacy
- 60,000 hours lifetime (L80/B20)

### Construction:

- Semi-opal high performance polycarbonate optic
- Steel frame, finished in white (RAL 9016)
- Supplied as standard with neutral white (4000K) LED

### Options:

- D - Dimmable DALI
- M3 - 3 hours integrated emergency
- A3 - Emergency self test
- D3 - DALI self test

# LOGIK

Recessed module for low glare and office areas

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
LGK200NW	16W - 4000K	2000	16	125	2.90
LGK300NW	23W - 4000K	3000	23	130	2.90
LGK400NW	31W - 4000K	4000	31	129	2.90

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
LGK200NW	595	595	42
LGK300NW	595	595	42
LGK400NW	595	595	42

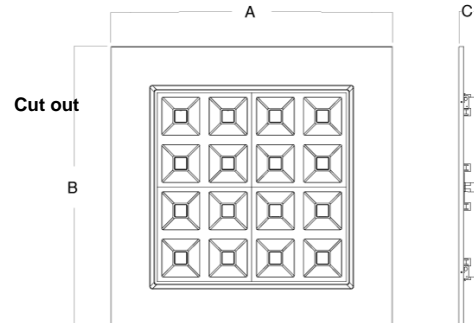

### Installation instructions:

Recessed lay-in for exposed T-Bar ceiling grid. Brackets available for plasterboard mount. Frame available for metal pan ceilings

### To specify:

Recessed multi-cell module to EN 12464 as per Tamlite LOGIK range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.