

# MARINER

High integrity, coastal protected LED floodlight



5 YR

IP65



### Features:

Available in 10W - 200W

Suitable for coastal areas

Full range of gear options including dimmable, DALI and emergency available

CRI: Ra>80

Up to 78 lumens per Watt efficacy

50,000 hours lifetime (L70/B50)

### Construction:

Marine grade coated aluminium body

Toughened glass

Adjustable bracket

Supplied as standard with neutral white (4000K) LED

### Options:

No options available

# MARINER

High integrity, coastal protected LED floodlight

### Order Codes


All dimensions are in millimetres

Order code	Description	Lumens (lm)	Total power (W)	Efficacy (lm/W)	Weight (kg)
EXPMG10FL	10W - 4000K	750	10	75	0.8
EXPMG30FL	30W - 4000K	2200	30	71	2.3
EXPMG50FL	50W - 4000K	3800	50	75	4.3
EXPMG100FL	100W - 4000K	7600	100	78	7.1
EXPMG120FL	120W - 4000K	9000	120	75	7.1
EXPMG200FL	200W - 4000K	16000	200	78	15.5

### Dimensions

All dimensions are in millimetres

Order code	A	B	C
EXPMG10FL	198	165	54
EXPMG30FL	323	242	79
EXPMG50FL	393	320	107
EXPMG100FL	461	381	129
EXPMG120FL	461	381	129
EXPMG200FL	630	470	165

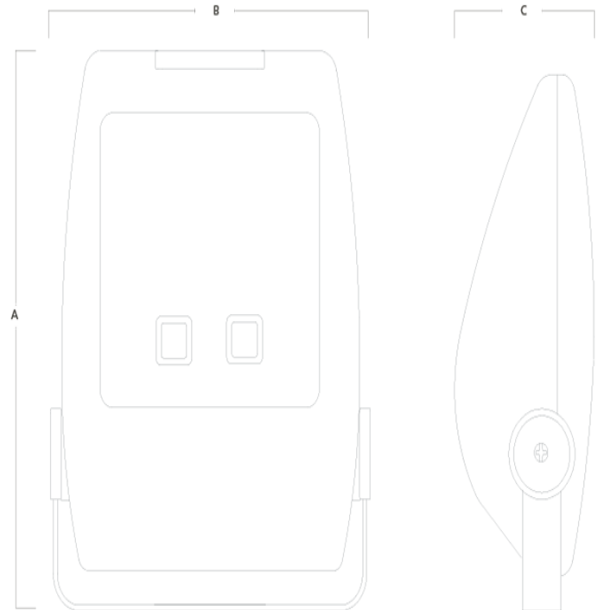

### Installation instructions:

Fixed via fixing holes and wired via rear cable entry

### To specify:

Marine grade coastal aluminium floodlight suites for coastal areas as per Tamlite MARINER range

Please Note: Order codes listed are for standard (non-emergency) versions only. For all other gear options, please contact Tamlite Lighting.